



PATTERN DIGEST

2008 VERSION

Preface

This manual has been prepared to help you obtain the maximum safety and value from Bridgestone tyres. It provides useful definitions, advice on proper selection and care, and lists the detailed specifications of a wide range of patterns and sizes. We hope that you will get the very most out of our high quality products.

This data is only related to products sold by Bridgestone Europe for use in the European markets. For any other applications, please refer to your nearest Bridgestone representative.

All theoretical data contained in this Pattern Digest refer to ETRTO standards.

© 2008 Bridgestone Europe NV/SA
Kleine Kloosterstraat 10 - 1932 Zaventem

Notice: Although great care has been taken in producing this manual, we can accept no responsibility for any loss or damage resulting from undetected errors or misprints which may have occurred.

Due to constant advances of tyre technology, the contents of this data book are subject to change without notice.

General Information

> General Information

1. Construction Diagram	5
2. Tyre Dimensions	5
3. Tyre Size Designations	6
4. Load Index	7
5. Speed Symbol	8
6. Speed Category	8
7. Safety & Inflation Pressure	8
8. Tyre Rotation	9
9. Run Flat Tyres	9
10. Winter Tyres	10
11. Conversion Chart	11
12. Rims Conversion Chart	15
13. Legend	20

> Tyre Size Chart PSR	21
-----------------------	----

> Tyre Size Chart RFT & MO Ext	25
--------------------------------	----

> Tyre Size Chart PXR	26
-----------------------	----

> Tyre Size Chart 4x4	29
-----------------------	----

> Tyre Size Chart CVR & CXR	31
-----------------------------	----

> Passenger Summer Tyres - Warranty	33
-------------------------------------	----

> Passenger Summer Tyres - RFT + EXT	55
--------------------------------------	----

> Passenger Summer Tyres - Replacement	63
--	----

> Passenger Winter Tyres - Warranty	69
-------------------------------------	----

> Passenger Winter Tyres - RFT + EXT	71
--------------------------------------	----

> Passenger Winter Tyres - Replacement	75
--	----

> 4x4 - Specific Info	85
-----------------------	----

> 4x4 Summer Tyres - Warranty	89
-------------------------------	----

> 4x4 Summer Tyres - RFT	101
--------------------------	-----

> 4x4 Summer Tyres - Replacement	105
----------------------------------	-----

> 4x4 Winter Tyres - Warranty	115
-------------------------------	-----

> 4x4 Winter Tyres - RFT	117
--------------------------	-----

> 4x4 Winter Tyres - Replacement	119
----------------------------------	-----

> Van Summer Tyres - Warranty	125
-------------------------------	-----

> Van Summer Tyres - Replacement	131
----------------------------------	-----

> Van Winter Tyres - Warranty	137
-------------------------------	-----


> Van Winter Tyres - Replacement	141
----------------------------------	-----

> Bridgestone Index	146
---------------------	-----


> Bridgestone addresses	150
-------------------------	-----

General Information

1. Construction diagram

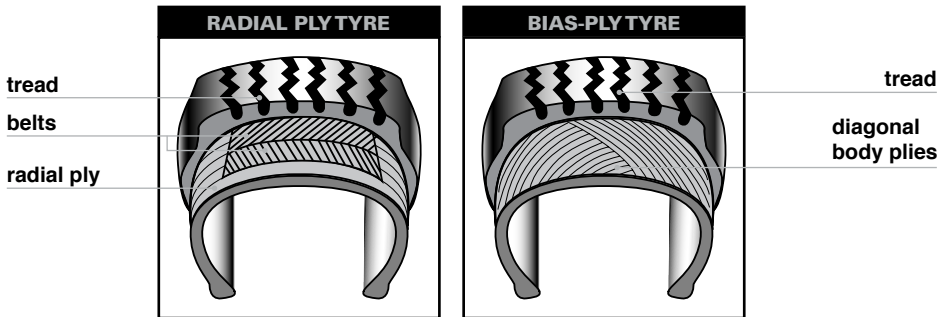


2. Tyre Dimensions

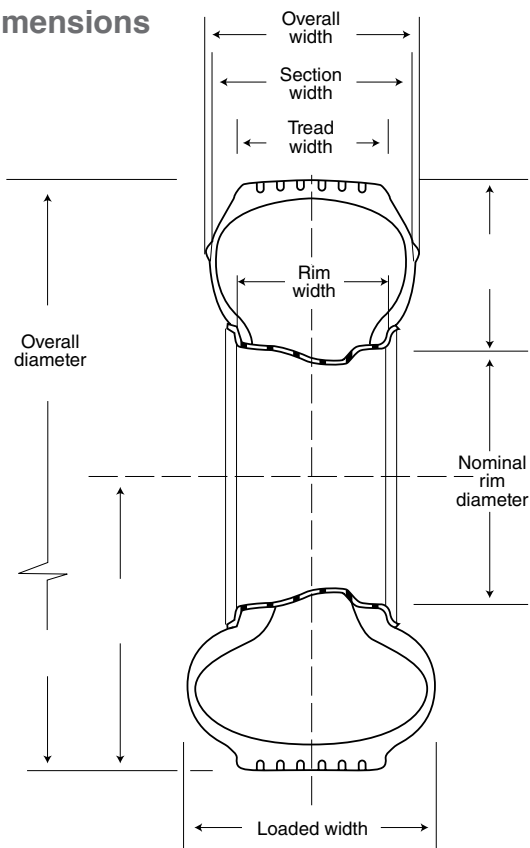

General Information

3. Tyre Size Designations

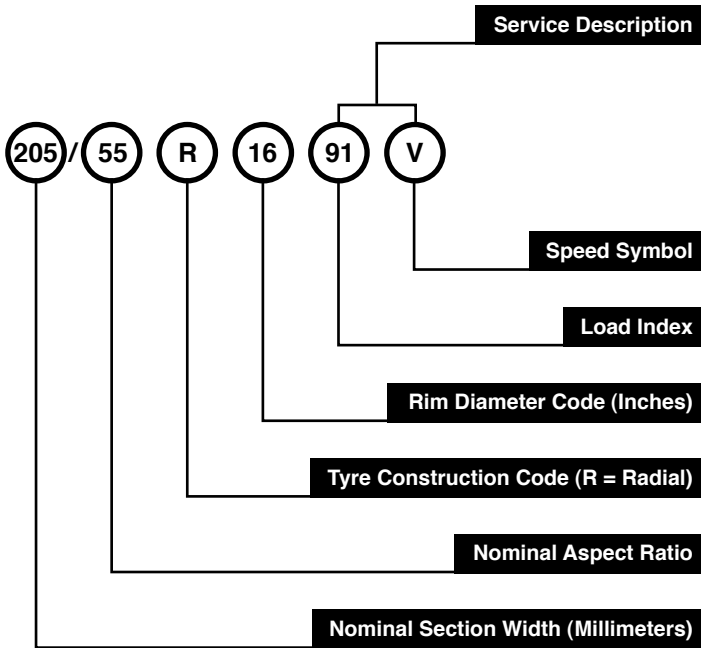

Other Forms:

195/65 R 16 C 104/102 R

* C = Commercial, stands for tyres specifically designed for commercial vehicle/light duty vehicles.

* 104/102: load index for single/dual use.

225/50 ZR 16

* Includes the speed rating after the aspect ratio and no service description.

225 / 45 ZR 17 91W

* Includes the speed rating after the aspect ratio and service description.

245 / 40 ZR 19 (94Y)

* Includes the speed rating after the aspect ratio and service description within brackets (only Y-rated tyres, indicates speed capability over 300 km/h).

285 / 35 RF 20 100 V

* RF = New designation of tyre structure in size description for Run Flat tyres.

P 265 / 65 R18 112 S

* P = Passenger, stands for Passenger car tyres in P-metric designation (TRA only).

LT 225 / 75 R 16 103/100 S

* LT = Light truck, stands for light truck tyres in LT-metric designation (TRA only).

General Information

4. Load Index

The LOAD INDEX is a numerical code associated with the maximum load a tyre can carry at the speed indicated by its Speed Symbol under specified service conditions specified by the tyre manufacturer up to and including 210 km/h. For speeds in excess of 210 km/h, actual load on the tyre should be reduced according to table "Percentage of Load capacity (%) vs. Speed".

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45	24	90	48	180	72	355	96	710	120	1,400
1	46.2	25	92.5	49	185	73	365	97	730	121	1,450
2	47.5	26	95	50	190	74	375	98	750	122	1,500
3	48.7	27	97.5	51	195	75	387	99	775	123	1,550
4	50	28	100	52	200	76	400	100	800	124	1,600
5	51.5	29	103	53	206	77	412	101	825	125	1,650
6	53	30	106	54	212	78	425	102	850	126	1,700
7	54.5	31	109	55	218	79	437	103	875	127	1,750
8	56	32	112	56	224	80	450	104	900	128	1,800
9	58	33	115	57	230	81	462	105	925	129	1,850
10	60	34	118	58	236	82	475	106	950	130	1,900
11	61.5	35	121	59	243	83	487	107	975	131	1,950
12	63	36	125	60	250	84	500	108	1,000	132	2,000
13	65	37	128	61	257	85	515	109	1,030	133	2,060
14	67	38	132	62	265	86	530	110	1,060	134	2,120
15	69	39	136	63	272	87	545	111	1,090	135	2,180
16	71	40	140	64	280	88	560	112	1,120	136	2,240
17	73	41	145	65	290	89	580	113	1,150	137	2,300
18	75	42	150	66	300	90	600	114	1,180	138	2,360
19	77.5	43	155	67	307	91	615	115	1,215	139	2,430
20	80	44	160	68	315	92	630	116	1,250	140	2,500
21	82.5	45	165	69	325	93	650	117	1,285		
22	85	46	170	70	335	94	670	118	1,320		
23	87.5	47	175	71	345	95	690	119	1,360		

Percentage of Load Capacity (%) versus Speed ⁽¹⁾				
Speed Capability of the vehicle (km/h)	Speed Symbol			
	H	V	W	Y
	%	%	%	%
210	100	100	100	100
220	—	97	100	100
230	—	94	100	100
240	—	91	100	100
250	—	—	95	100
260	—	—	90	100
270	—	—	85	100
280	—	—	—	95
290 ⁽²⁾	—	—	—	90
300 ⁽²⁾	—	—	—	85

(1) For intermediate maximum speeds, linear interpolation of the tyre load capacity is permitted.

(2) For speed capabilities over 300 km/h, the percentage of the load capacities and the relevant inflation pressures will be agreed between vehicle and tyre manufacturers (or their national associations) taking into consideration the vehicle characteristics and the type of service.

Notes : The load and pressure information is provided for general reference only. In practice, the vehicle manufacturers recommended tyre pressures should be followed.

General Information

5. Speed Symbol

The SPEED SYMBOL indicates the maximum speed at which the tyre can carry a load corresponding to its Load Index under service conditions specified by the tyre manufacturer.

Speed Symbol	Speed (km/h)	Speed Symbol	Speed (km/h)
A1	5	K	110
A2	10	L	120
A3	15	M	130
A4	20	N	140
A5	25	P	150
A6	30	Q	160
A7	35	R	170
A8	40	S	180
B	50	T	190
C	60	U	200
D	65	H	210
E	70	V	240
F	0	W	270
G	90	Y	300
J	100		

6. Speed Category

The SPEED CATEGORY markings shown below indicate tyre speed capabilities above 240 km/h and are included within the tyre size designation e.g. 215/50 ZR 15. Generally, Service Description is not shown on such tyres. For actual speed capabilities and load capacities, consult the tyre manufacturer concerned. If tyres are suitable for speeds over 300 km/h, the service description should be marked within brackets (see p. 6).

SPEED CATEGORY MARKINGS	tyre speed capability (km/h)
Radial	
ZR	over 240

7. Safety & Inflation Pressure

Car manufacturer's tyre pressure recommendations should always be followed and can be found in the car manual.

Incorrect tyre pressure is one of the major causes of tyre degradation. **This seriously affects safety, driving performance, tyre life as well as fuel consumption.**




Thus we recommend that:

- You measure and adjust pressure when the tyre is cool at least once a month (for continuous high-speed highway driving, increase recommended tyre pressure by 0.2 to 0.3 bar (3 to 5 psi)).
- You check tyre wear with tread wear indicator. They appear in the main grooves when tread has worn down to 1.6mm, indicating that tyres **MUST** be replaced.

General Information

8. Tyre Rotation

Periodical rotation will increase the life of your tyres. Please follow the below shown diagram. Preferably new tyres should be introduced on the rear (including spare)

Unidirectional Pattern	Symmetrical & Asymmetrical Pattern	
All Vehicles	Rear Wheel Drive & 4x4 Vehicles	Front Wheel Drive Vehicles
		

9. Run Flat Tyre **RFT**

Today's car manufacturers are introducing RFT tyres on an increasing number of vehicles.

The RFT tyres are capable of continuing to support the vehicle's weight even at zero pressure.

This enables the customer, in the case of a total air loss, to drive at reduced speed to the next service station. The driver no longer has to stop at dangerous areas (highways / motorways / bridges / tunnels, etc.) to jack up the vehicle and change the flat tyre.

As the driver might not recognize that one tyre is operating at zero pressure, **a pressure monitor system must always be equipped in the vehicle**, warning the driver immediately if an air loss occurs.

For sensors of warning systems, mounted inside the wheel. Extra care has to be applied during dismounting and mounting of the tyre.

Check with the vehicle's owner / car manufacturer's manual and investigate which kind of sensors are used in your vehicle to prevent any possible damage during handling.

Each RFT tyre is specifically designed for being fitted on a particular car model, and thus:

- you should always replace RFT tyres by RFT tyres for your car
- you should not fit RFT tyres on a vehicle which is not designed for such tyres.

Bridgestone has set up a pan-European service network, offering the highest possible standards of equipment and services to drivers equipped with RFT.

Generally: Non trained and inexperienced people should not mount tyres.

Bridgestone RFT tyres can be recognized by the above logo applied on the tyre's sidewall.

10. Winter Tyres

Why & When to use winter tyres?

Winter tyres have not been developed without a reason ! Winter tyres aren't just for snow and ice!

Once the temperature drops below 7°C, winter tyres are more effective than equivalent summer tyres, on bad road conditions (wet, snow, ice, ...) but also in good conditions (dry). Indeed, they are optimized for low temperatures (thanks to specific compounds) and bad road conditions (specific pattern design)

How to recognize a winter tyre?

The difference to summer tyres is actually visible: compared to summer profile, winter tyres have additional sipes, which ensure a firm grip also under bad conditions like snow and ice.

Bridgestone winter tyres are marked with the "3 peak mountain symbol", which is a guaranty for good snow performance.



Different types of winter tyres

Winter tyres can be separated in 2 main categories:

- Mild winter conditions tyres: applicable for central Europe countries (France, Germany, Austria, Switzerland, Italy...).
- Nordic conditions winter tyres: can be studless or studded, and applicable for Nordic countries (Norway, Sweden, Finland, Baltic countries, Denmark, ...)

What to use?

We recommend using the right tyres at the right time, to always ensure the best performance possible. The use of 4 tyres of the same type is a safety recommendation, as having different type of tyres fitted on your car (eg. Winter tyres on front axle and summer tyre on rear axle) may lead to instability during cornering and braking situations.

Winter tyres are a safety investment.

General Information

11. Conversion Chart

ETRTO theoretical standards

Please contact your vehicle manufacturer or dealer if you have any questions or queries.

Conversion sizes are those with similar overall diameter (OD) $\pm$ 6mm and same or greater load index (LI).

Actual Size			Conversion Size		
	LI	OD		LI	OD
135R12	65	522	145/65R13	69	518
145R12	72	542	165/70R12	77	537
			155/70R13	75	548
			165/65R13	77	544
			175/60R13	77	540
155R12	76	550	165/65R13	77	544
			185/60R13	80	552
175R13	86	608	195/65R14	89	610
			205/60R14	88	602
			205/55R15	88	607
			225/50R15	91	607
			205/50R16	87	612
			225/45R16	89	608
			245/35R17	87	604
155R14	80	604	175/70R14	84	602
			195/65R14	89	610
			205/60R14	88	602
			205/55R15	88	607
			225/50R15	91	607
			195/50R16	84	602
			225/45R16	89	608
			215/40R17	83	604
			245/35R17	87	604
165R14	84	622	185/70R14	88	616
			185/65R15	88	621
			205/60R15	91	627
			215/50R16	90	622
			245/45R16	94	626
			215/45R17	87	626
			235/40R17	90	620
			245/40R17	91	628
			275/35R17	94	624
165R15	86	646	205/65R15	94	647
			225/60R15	96	650
			215/55R16	93	642
			235/50R16	95	642
			215/50R17	91	648
			235/45R17	93	644
			245/45R17	95	652
			265/40R17	96	644
			275/40R17	98	652
			235/40R18	91	645
			265/35R18	93	643
			275/35R18	95	649
			265/30R19	89	643
135/80R13	70	546	155/70R13	75	548
			165/65R13	77	544
			175/60R13	77	540
			185/60R13	80	552
145/80R13	75	562	165/70R13	79	562
			175/65R13	80	558
			155/65R14	75	558
			175/60R14	79	566
			185/55R14	80	560
			195/45R15	78	557
155/80R13	79	578	175/70R13	82	576
			175/65R14	82	584
			185/60R14	82	578
			195/50R15	82	577
			215/45R15	84	575
			215/40R16	82	578
165/80R13	83	594	185/70R13	86	590
			185/65R14	86	596
			195/60R14	86	590
			195/55R15	85	595
			215/50R15	88	597
			205/45R16	83	590
175/80R14	88	636	195/70R14	91	630
			195/65R15	91	635
			215/60R15	94	639
			205/55R16	91	632
			215/55R16	93	642
			225/50R16	92	632
			235/50R16	95	642
			205/50R17	89	638
			225/45R17	90	634
			255/40R17	94	636
			225/40R18	88	637
			255/35R18	90	635
185/80R14	91	652	205/65R15	94	647
			225/60R15	96	650
			205/60R16	92	653
			225/55R16	95	654
			215/50R17	91	648
			245/45R17	95	652
			275/40R17	98	652
			245/40R18	93	653
			275/35R18	95	649
			285/35R18	97	657

NOTES:

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to differences in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.

General Information

Actual Size			Conversion Size		
	LI	OD		LI	OD
145/70R12	69	509	175/50R13	72	506
165/70R12	77	537	175/60R13	77	540
145/70R13	71	534	155/65R13	73	532
			175/60R13	77	540
155/70R13	75	548	165/65R13	77	544
			185/60R13	80	552
			165/60R14	75	554
165/70R13	79	562	175/65R13	80	558
			175/60R14	79	566
			185/55R14	80	560
175/70R13	82	576	185/60R14	82	578
			195/55R14	82	570
			195/50R15	82	577
			215/45R15	84	575
			215/40R16	82	578
185/70R13	86	590	185/65R14	86	596
			195/60R14	86	590
			205/50R15	86	587
165/70R14	81	588	175/65R14	82	584
			195/60R14	86	590
			185/55R15	82	585
			205/50R15	86	587
			205/45R16	83	590
			225/35R17	82	590
175/70R14	84	602	185/65R14	86	596
			205/60R14	88	602
			205/55R15	88	607
			215/50R15	88	597
			225/50R15	91	607
			195/50R16	84	602
			225/45R16	89	608
			245/35R17	87	604
185/70R14	88	616	195/65R14	89	610
			185/65R15	88	621
			195/60R15	88	615
			215/50R16	90	622
			235/40R17	90	620
195/70R14	91	630	195/65R15	91	635
			205/60R15	91	627
			205/55R16	91	632
			225/50R16	92	632
			245/45R16	94	626
			245/40R17	91	628
			255/40R17	94	636
			275/35R17	94	624
			285/30R18	93	629
205/70R14	95	644	225/60R15	96	650
			235/50R16	95	642
			265/40R17	96	644
			275/35R18	95	649

Actual Size			Conversion Size		
	LI	OD		LI	OD
165/65R13	77	544	175/60R13	77	540
175/65R13	80	558	185/60R13	80	552
			185/55R14	80	560
155/65R14	75	558	165/60R14	75	554
			185/55R14	80	560
			195/45R15	78	557
165/65R14	79	570	175/60R14	79	566
			195/55R14	82	570
			215/45R15	84	575
175/65R14	82	584	185/60R14	82	578
			195/60R14	86	590
			185/55R15	82	585
			205/50R15	86	587
			205/45R16	83	590
			215/40R16	82	578
			225/35R17	82	590
185/65R14	86	596	195/60R14	86	590
			205/60R14	88	602
			215/50R15	88	597
195/65R14	89	610	225/50R15	91	607
			225/45R16	89	608
185/65R15	88	621	195/60R15	88	615
			205/60R15	91	627
			215/50R16	90	622
			245/45R16	94	626
			235/40R17	90	620
			275/35R17	94	624
195/65R15	91	635	215/60R15	94	639
			205/55R16	91	632
			225/50R16	92	632
			255/40R17	94	636
			285/30R18	93	629
205/65R15	94	647	225/60R15	96	650
			235/50R16	95	642
			245/45R17	95	652
			265/40R17	96	644
			275/40R17	98	652
			275/35R18	95	649
215/65R15	96	661	255/50R16	99	662
			255/45R17	98	662
			285/40R17	100	660
			335/35R17	97	666
			285/35R18	97	657
			295/35R18	99	663

NOTES:

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to differences in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.

General Information

Actual Size			Conversion Size		
	LI	OD		LI	OD
165/60R14	75	554	185/55R14	80	560
			195/45R15	78	557
175/60R14	79	566	185/55R14	80	560
			195/55R14	82	570
185/60R14	82	578	195/50R15	82	577
			215/45R15	84	575
			215/40R16	82	578
195/60R14	86	590	205/50R15	86	587
205/60R14	88	602	205/55R15	88	607
			215/50R15	88	597
			225/50R15	91	607
			225/45R16	89	608
195/60R15	88	615	235/40R17	90	620
205/60R15	91	627	205/55R16	91	632
			225/50R16	92	632
			245/45R16	94	626
			245/40R17	91	628
			275/35R17	94	624
			285/30R18	93	629
215/60R15	94	639	235/50R16	95	642
			255/40R17	94	636
			265/40R17	96	644
225/60R15	96	650	265/40R17	96	644
			275/40R17	98	652
205/60R16	92	653	225/55R16	95	654
			245/45R17	95	652
			275/40R17	98	652
			245/40R18	93	653
			275/35R18	95	649
			285/35R18	97	657
235/60R16	100	688	285/40R18	101	685
195/55R14	82	570	215/45R15	84	575
185/55R15	82	585	205/50R15	86	587
			205/45R16	83	590
			225/35R17	82	590
195/55R15	85	595	215/50R15	88	597
205/55R15	88	607	225/50R15	91	607
			225/45R16	89	608
205/55R16	91	632	225/50R16	92	632
			245/45R16	94	626
			245/40R17	91	628
			255/40R17	94	636
			285/30R18	93	629
215/55R16	93	642	235/50R16	95	642
			235/45R17	93	644
			255/40R17	94	636
			265/40R17	96	644
			265/35R18	93	643
225/55R16	95	654	245/45R17	95	652
			275/40R17	98	652
			285/40R17	100	660
			275/35R18	95	649
			285/35R18	97	657
225/55R17	97	680	285/40R18	101	685
			285/35R19	99	683

Actual Size			Conversion Size		
	LI	OD		LI	OD
195/50R15	82	577	215/45R15	84	575
			215/40R16	82	578
195/50R16	84	602	225/45R16	89	608
			245/35R17	87	604
205/50R16	87	612	225/45R16	89	608
215/50R16	90	622	245/45R16	94	626
			235/40R17	90	620
			245/40R17	91	628
			275/35R17	94	624
225/50R16	92	632	245/45R16	94	626
			255/40R17	94	636
			285/30R18	93	629
235/50R16	95	642	265/40R17	96	644
255/50R16	99	662	285/40R17	100	660
			295/35R18	99	663
205/50R17	89	638	225/45R17	90	634
			235/45R17	93	644
			255/40R17	94	636
			265/40R17	96	644
			255/35R18	90	635
			265/35R18	93	643
			265/30R19	89	643
215/50R17	91	648	235/45R17	93	644
			245/45R17	95	652
			265/40R17	96	644
			275/40R17	98	652
			235/40R18	91	645
			245/40R18	93	653
			265/35R18	93	643
			275/35R18	95	649

NOTES:

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to differences in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.

General Information

Actual Size			Conversion Size		
	LI	OD		LI	OD
245/45R16	94	626	275/35R17	94	624
215/45R17	87	626	235/40R17	90	620
			245/40R17	91	628
			275/35R17	94	624
			285/30R18	93	629
225/45R17	90	634	245/40R17	91	628
			255/40R17	94	636
			255/35R18	90	635
			285/30R18	93	629
235/45R17	93	644	265/40R17	96	644
			265/35R18	93	643
			275/35R18	95	649
245/45R17	95	652	275/40R17	98	652
			275/35R18	95	649
			285/35R18	97	657
255/45R17	98	662	285/40R17	100	660
			295/35R18	99	663
245/45R18	96	677	285/35R19	99	683
255/45R18	99	687	285/40R18	101	685
			285/35R19	99	683

Actual Size			Conversion Size		
	LI	OD		LI	OD
205/40R17	80	596	225/35R17	82	590
215/40R17	83	604	245/35R17	87	604
235/40R17	90	620	275/35R17	94	624
245/40R17	91	628	275/35R17	94	624
			285/30R18	93	629
225/40R18	88	637	255/35R18	90	635
			265/35R18	93	643
			265/30R19	89	643
235/40R18	91	645	265/35R18	93	643
			275/35R18	95	649
245/40R18	93	653	275/35R18	95	649
			285/35R18	97	657
255/40R18	95	661	285/35R18	97	657
			295/35R18	99	663
265/40R18	97	669	295/35R18	99	663
255/40R19	96	687	285/35R19	99	683

Actual Size			Conversion Size		
	LI	OD		LI	OD
255/35R18	90	635	285/30R18	93	629
255/35R20	93	686	285/30R20	95	680

NOTES:

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to differences in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.

General Information

Rims for '70' series - metric designation

TYRE SIZE		APPROVED RIMS							
135/70 R	13	3.50B	3 1/2J	4.00B	4J	4.50B	4 1/2J		
145/70 R	12	3.50B	4.00B	4.50B	5.00B				
R	13, 14	3.50B	3 1/2J	4.00B	4J	4.50B	4 1/2J	5.00B	5J
155/70 R	12	4.00B	4.50B	5.00B					
R	13, 14	4.00B	4J	4.50B	4 1/2J	5.00B	5J		
R	15	4J	4 1/2J	5J					
165/70 R	10, 12	4.00B	4.50B	5.00B	5.50B				
R	13	4.00B	4J	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J
R	14	4J	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J	
R	15	4J	4 1/2J	5J	5 1/2J				
175/70 R	13	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J	6.00B	6J
R	14	4 1/2J	5.00B	5J	5.50B	5 1/2J	6J		
R	15	4 1/2J	5J	5 1/2J	6J				
185/70 R	13	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J	6.00B	6J
R	14, 15, 17	4 1/2J	5J	5 1/2J	6J				
195/70 R	13	5.00B	5J	5.50B	5 1/2J	6.00B	6J	6 1/2J	
R	14, 15	5J	5 1/2J	6J	6 1/2J				
205/70 R	14, 15, 16	5J	5 1/2J	6J	6 1/2J	7J			
215/70 R	14, 15, 16, 17	5 1/2J	6J	6 1/2J	7J				
225/70 R	14, 15, 16, 17	6J	6 1/2J	7J	7 1/2J				
235/70 R	15, 16, 17	6J	6 1/2J	7J	7 1/2J	8J			
245/70 R	15, 16, 17	6 1/2J	7J	7 1/2J	8J				
255/70 R	15, 16, 17, 18	6 1/2J	7J	7 1/2J	8J	8 1/2J			
265/70 R	15, 16, 17, 18	7J	7 1/2J	8J	8 1/2J	9J			
275/70 R	16	7J	7 1/2J	8J	8 1/2J	9J			
315/70 R	17	8J	8 1/2J	9J	9 1/2J	10J	10 1/2J		

The Measuring rim widths are shown in bold.

- CONSULT THE TYRE MANUFACTURER WITH REGARD TO : the use of B flange rims with tyres for which B flange rims are not specified above.
- CONSULT THE TYRE AND RIM/WHEEL MANUFACTURERS for confirmation of the suitability of the tyre/wheel assembly to the intended service.

General Information

Rims for '65' series - metric designation

TYRE SIZE		APPROVED RIMS							
145/65 R	14	4.00B	4J	4.50B	4 1/2J	5.00B	5J		
R	15	4J	4 1/2J	5J					
155/65 R	13, 14	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J		
R	15	4 1/2J	5J	5 1/2J					
165/65 R	13	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J	6.00B	6J
R	14	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J	6J	
R	15	4 1/2J	5J	5 1/2J	6J				
175/65 R	13	5.00B	5J	5.50B	5 1/2J	6.00B	6J		
R	14	5.00B	5J	5.50B	5 1/2J	6J			
R	15	5J	5 1/2J	6J					
185/65 R	14, 15, 16, 17	5J	5 1/2J	6J	6 1/2J				
195/65 R	14, 15, 16	5 1/2J	6J	6 1/2J	7J				
205/65 R	14, 15, 16	5 1/2J	6J	6 1/2J	7J	7 1/2J			
215/65 R	14, 15, 16, 17	6J	6 1/2J	7J	7 1/2J				
225/65 R	15, 16, 17, 18	6J	6 1/2J	7J	7 1/2J	8J			
235/65 R	16, 17, 18	6 1/2J	7J	7 1/2J	8J	8 1/2J			
245/65 R	17	7J	7 1/2J	8J	8 1/2J				
255/65 R	15, 16, 17	7J	7 1/2J	8J	8 1/2J	9J			
265/65 R	17	7 1/2J	8J	8 1/2J	9J	9 1/2J			
275/65 R	17, 18	7 1/2J	8J	8 1/2J	9J	9 1/2J			
285/65 R	16, 17	8J	8 1/2J	9J	9 1/2J	10J			

Rims for '60' series - metric designation

145/60 R	13	4J	4 1/2J	5J					
155/60 R	15	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J		
165/60 R	12	4.50B	5.00B	5.50B	6.00B				
R	13	4.50B	4 1/2J	5.00B	5J	5.50B	5 1/2J	6.00B	6J
R	14	4 1/2J	5.00B	5J	5 1/2J	6J			
175/60 R	13	5.00B	5J	5.50B	5 1/2J	6.00B	6J		
R	14	5.00B	5J	5 1/2J	6J				
R	15, 16	5J	5 1/2J	6J					
185/60 R	13	5.00B	5J	5.50B	5 1/2J	6.00B	6J	6 1/2J	
R	14, 15, 16	5J	5 1/2J	6J	6 1/2J				
195/60 R	13	5.50B	5 1/2J	6.00B	6J	6 1/2J	7J		
R	14, 15, 16	5 1/2J	6J	6 1/2J	7J				
205/60 R	13, 14, 15, 16	5 1/2J	6J	6 1/2J	7J	7 1/2J			
215/60 R	14, 15, 16, 17	6J	6 1/2J	7J	7 1/2J				
225/60 R	14, 15, 16, 17, 18	6J	6 1/2J	7J	7 1/2J	8J			
235/60 R	14, 15, 16, 17, 18	6 1/2J	7J	7 1/2J	8J	8 1/2J			
245/60 R	14, 15, 16, 17, 18	7J	7 1/2J	8J	8 1/2J				
255/60 R	15, 16, 17, 18	7J	7 1/2J	8J	8 1/2J	9J			
265/60 R	17, 18	7 1/2J	8J	8 1/2J	9J	9 1/2J			
275/60 R	15, 16, 17, 18, 20	7 1/2J	8J	8 1/2J	9J	9 1/2J			
285/60 R	17, 18	8J	8 1/2J	9J	9 1/2J	10J			

General Information

Rims for '55' series - metric designation

155/55 R	14	41/2J	5J	51/2J					
165/55 R	13	4.50B	41/2J	5.00B	5J	5.50B	51/2J	6.00B	6J
R	14, 15	41/2J	5J	51/2J	6J				
175/55 R	13	5.00B	5J	5.50B	51/2J	6.00B	6J		
R	15, 16, 17	5J	51/2J	6J					
185/55 R	14, 15, 16	5J	51/2J	6J	61/2J				
195/55 R	13	5.50B	51/2J	6.00B	6J	61/2J	7J		
R	14, 15, 16	51/2J	6J	61/2J	7J				
205/55 R	13	5.50B	51/2J	6.00B	6J	61/2J	7J	71/2J	
R	14, 15, 16, 17, 18	51/2J	6J	61/2J	7J	71/2J			
215/55 R	15, 16, 17, 18	6J	61/2J	7J	71/2J				
225/55 R	13, 14, 15, 16, 17, 18	6J	61/2J	7J	71/2J	8J			
235/55 R	15, 16, 17, 18, 19	61/2J	7J	71/2J	8J	81/2J			
245/55 R	16, 17, 18, 19	7J	71/2J	8J	81/2J				
255/55 R	16, 17, 18, 19	7J	71/2J	8J	81/2J	9J			
265/55 R	18, 19	71/2J	8J	81/2J	9J	91/2J			
275/55 R	15, 16, 17, 19, 20	71/2J	8J	81/2J	9J	91/2J			
285/55 R	18, 19, 20	8J	81/2J	9J	91/2J	10J			

Rims for '50' series - metric designation

TYRE SIZE		APPROVED RIMS							
165/50 R	15	41/2J	5J	51/2J	6J				
175/50 R	13	5.00B	5J	5.50B	51/2J	6.00B	6J		
R	14, 15, 16	5J	51/2J	6J					
185/50 R	14, 16	5J	51/2J	6J	61/2J				
195/50 R	15, 16	51/2J	6J	61/2J	7J				
205/50 R	13	5.50B	51/2J	6.00B	6J	61/2J	7J	71/2J	
R	15, 16, 17	51/2J	6J	61/2J	7J	71/2J			
215/50 R	15, 16, 17, 18	6J	61/2J	7J	71/2J				
225/50 R	15, 16, 17, 18	6J	61/2J	7J	71/2J	8J			
235/50 R	16, 17, 18, 19	61/2J	7J	71/2J	8J	81/2J			
245/50 R	16, 17, 18, 19	7J	71/2J	8J	81/2J				
255/50 R	16, 17, 18, 19, 20, 21	7J	71/2J	8J	81/2J	9J			
265/50 R	16, 19, 20	71/2J	8J	81/2J	9J	91/2J			
275/50 R	17, 18, 19, 20	71/2J	8J	81/2J	9J	91/2J			
285/50 R	15, 18, 20	8J	81/2J	9J	91/2J	10J			
295/50 R	15, 16, 20	8J	81/2J	9J	91/2J	10J	101/2J		
305/50 R	15, 20	81/2J	9J	91/2J	10J	101/2J	11J		

The Measuring rim widths are shown in bold.

- CONSULT THE TYRE MANUFACTURER WITH REGARD TO : the use of B flange rims with tyres for which B flange rims are not specified above.
- CONSULT THE TYRE AND RIM/WHEEL MANUFACTURERS for confirmation of the suitability of the tyre/wheel assembly to the intended service.

General Information

Rims for '45' series - metric designation

TYRE SIZE		APPROVED RIMS				
165/45 R	15, 16	5J	5 1/2J	6J		
175/45 R	15	5 1/2J	6J	6 1/2J		
185/45 R	15	6J	6 1/2J	7J		
195/45 R	13, 14, 15, 16, 17	6J	6 1/2J	7J	7 1/2J	
205/45 R	14, 15, 16, 17, 18	6 1/2J	7J	7 1/2J		
215/45 R	15, 16, 17, 18	7J	7 1/2J	8J		
225/45 R	13, 15, 16, 17, 18, 19	7J	7 1/2J	8J	8 1/2J	
235/45 R	15, 17, 18, 19	7 1/2J	8J	8 1/2J	9J	
245/45 R	13, 16, 17, 18, 19, 20	7 1/2J	8J	8 1/2J	9J	
255/45 R	15, 17, 18, 19, 20	8J	8 1/2J	9J	9 1/2J	
265/45 R	20, 21	8 1/2J	9J	9 1/2J	10J	
275/45 R	13, 17, 18, 19, 20, 22	8 1/2J	9J	9 1/2J	10J	10 1/2J
285/45 R	18, 19, 20, 21, 22	9J	9 1/2J	10J	10 1/2J	
295/45 R	18, 19, 20, 22	9 1/2J	10J	10 1/2J	11J	
305/45 R	20, 22, 24	9 1/2J	10J	10 1/2J	11J	11 1/2J
315/45 R	17	10J	10 1/2J	11J	11 1/2J	12J

Rims for '40' series - metric designation

TYRE SIZE		APPROVED RIMS				
195/40 R	14, 16, 17	6 1/2J	7J	7 1/2J		
205/40 R	13, 16, 17, 18	7J	7 1/2J	8J		
215/40 R	14, 15, 16, 17, 18	7J	7 1/2J	8J	8 1/2J	
225/40 R	14, 16, 17, 18, 19	7 1/2J	8J	8 1/2J	9J	
235/40 R	17, 18, 19	8J	8 1/2J	9J	9 1/2J	
245/40 R	17, 18, 19, 20	8J	8 1/2J	9J	9 1/2J	
255/40 R	16, 17, 18, 19, 20	8 1/2J	9J	9 1/2J	10J	
265/40 R	17, 18, 20, 21, 22	9J	9 1/2J	10J	10 1/2J	
275/40 R	17, 18, 19, 20, 21	9J	9 1/2J	10J	10 1/2J	11J
285/40 R	15, 17, 18, 19, 20, 22	9 1/2J	10J	10 1/2J	11J	
295/40 R	17, 18, 20, 22, 24	10J	10 1/2J	11J	11 1/2J	
305/40 R	22, 23, 24	10J	10 1/2J	11J	11 1/2J	12J
315/40 R	23, 25, 26	10 1/2J	11J	11 1/2J	12J	12 1/2J
325/40 R	22	11J	11 1/2J	12J	12 1/2J	13J

Rims for '35' series - metric designation

TYRE SIZE		APPROVED RIMS				
215/35 R	16, 17, 18, 19	7J	7 1/2J	8J	8 1/2J	
225/35 R	17, 18, 19, 20	7 1/2J	8J	8 1/2J	9J	
235/35 R	15, 18, 19, 20	8J	8 1/2J	9J	9 1/2J	
245/35 R	15, 16, 17, 18, 19, 20, 21, 22	8J	8 1/2J	9J	9 1/2J	
255/35 R	14, 16, 18, 19, 20, 21, 22	8 1/2J	9J	9 1/2J	10J	
265/35 R	17, 18, 19, 20, 21, 22	9J	9 1/2J	10J	10 1/2J	
275/35 R	17, 18, 19, 20, 21, 22	9J	9 1/2J	10J	10 1/2J	11J
285/35 R	18, 19, 20, 21, 22, 23, 24	9 1/2J	10J	10 1/2J	11J	
295/35 R	18, 19, 21, 22, 24	10J	10 1/2J	11J	11 1/2J	
305/35 R	19, 20, 21, 22, 23, 24	10J	10 1/2J	11J	11 1/2J	12J
315/35 R	17, 20, 21, 24	10 1/2J	11J	11 1/2J	12J	12 1/2J
325/35 R	28	11J	11 1/2J	12J	12 1/2J	13J
335/35 R	17	11J	11 1/2J	12J	12 1/2J	13J
345/35 R	15, 18, 19	11 1/2J	12J	12 1/2J	13J	13 1/2J

General Information

Rims for '30' series - metric designation

TYRE SIZE	APPROVED RIMS
225/30 R 18, 19, 20	8J
235/30 R 20, 22	8 1/2J
245/30 R 18, 19, 20, 22	8J 8 1/2J 9J
255/30 R 18, 19, 20, 21, 22, 24	8 1/2J 9J 9 1/2J
265/30 R 18, 19, 20, 21, 22	9J 9 1/2J 10J
275/30 R 19, 20, 22, 23, 24	9J 9 1/2J 10J
285/30 R 18, 19, 20, 21, 22, 24	9 1/2J 10J 10 1/2J
295/30 R 18, 19, 20, 21, 22, 23	10J 10 1/2J 11J
305/30 R 19, 22, 26	10 1/2J 11J 11 1/2J
315/30 R 18, 22, 24	10 1/2J 11J 11 1/2J
325/30 R 18, 19, 20, 21	11J 11 1/2J 12J
335/30 R 18, 20	11 1/2J 12J 12 1/2J
345/30 R 19	11 1/2J 12J 12 1/2J

Rims for '25' series - metric designation

TYRE SIZE	APPROVED RIMS
255/25 R 22	9J
275/25 R 20, 22, 24	10J
285/25 R 20, 22	10 1/2J
295/25 R 20, 21, 22	10J 10 1/2J 11J
305/25 R 19, 20, 22, 23, 26	10 1/2J 11J 11 1/2J
315/25 R 19, 22, 23	11J 11 1/2J 12J
325/25 R 20	11 1/2J 12J 12 1/2J
335/25 R 19, 22	11 1/2J 12J 12 1/2J
345/25 R 20	12J 12 1/2J 13J
355/25 R 19	12 1/2J 13J 13 1/2J

The Measuring rim widths are shown in bold.

- CONSULT THE TYRE MANUFACTURER WITH REGARD TO : the use of B flange rims with tyres for which B flange rims are not specified above.
- CONSULT THE TYRE AND RIM/WHEEL MANUFACTURERS for confirmation of the suitability of the tyre/wheel assembly to the intended service.

13. Legend

Tyre Size	Load Index	Speed Symbol	Measuring Rim	Overall Diameter	Overall Width	Static Loaded Radius	Rolling Circumference

Max. Load values are expressed in kilograms (kg.)

Dimensions are expressed in mm

Tyre Size Chart PSR

		RE050A RE050 Other ER300 Other B250 Other					
aspect ratio	tyre size	potenza			turanza		B-series
82 series	195/82R14RFD						S(9)
80 series	145/80R13						T(7)
	155/80R13						T(7/10)
	165/80R13						T(7)
	145/80R14						T(12)
	175/80R14						T(8)
70 series	145/70R12						S(13)
	145/70R13						T(7)
	155/70R13					T	
	165/70R13					T	
	175/70R13					T	
	185/70R13						T(7)
	165/70R14					S/T	T(10)
	175/70R14					T	H(10)
	175/70R14RFD						T(10)
	185/70R14						T(7)/H(10)
	195/70R14						T(8)
	195/70R14RFD						S(14)
	195/70R15						S(13)
	195/70R15RFD						T(8)
	225/70R16					H	
65 series	145/65R13						S(15)
	155/65R13					T	
	165/65R13					T	
	175/65R13					T	
	155/65R14					T	S(13)
	165/65R14					T	S(10)/T(10)
	175/65R14					T/H	T(10)/T(12)
	185/65R14					T/H	T(10)/H(13)
	195/65R14			V(17)			T(7)
	145/65R15						T(18)
	165/65R15					T	
	175/65R15					T	T(10)
	185/65R15				H	T/H	H(10)
	195/65R15				H/V	T/H	T(13)/H(13)/V(13)
	195/65R15RFD						T(13)
	195/65R15XL						H(13)
	205/65R15				H/V	V(6)	T(13)
	215/65R15				H		T(7)
	195/65R16					V	
	215/65R16				H		
60 series	165/60R14						T(20)/H(20)
	175/60R14			H(17)			
	185/60R14				H		T
	195/60R14				H		
	155/60R15					T	
	185/60R15			H(19)	H	H(6)	H
	185/60R15XL				H		
	195/60R15			H(17/19)	H/V	H(6)	T(13)/H(13)/V(13)
	205/60R15				H/V		
	225/60R15				V/W		

(1) S01L & S01R - (2) S01 - (3) S02PP - (4) S02A - (5) ER30 - (6) B330EVO - (7) B330 - (8) S381 - (9) B391 - (10) RE720 - (11) B381 - (12) B390 - (13) SF226 - (14) GR01 - (15) RE88 - (16) B340 - (17) RE080 - (18) B371 - (19) RE070 - (20) RE031 - (21) RE030 - (22) RE010 - (23) ER31 - (24) ER370 - (25) ER33 - (26) RE040

Tyre Size Chart PSR

		RE050A		RE050	Other	ER300	Other	B250	Other
aspect ratio	tyre size	potenza			turanza			B-series	
60 series	195/60R16				V				
	205/60R16				H/V	H(6)/V(26)			
	205/60R16XL				W				
	215/60R16				W	H(6)			
	215/60R16XL				H				
	225/60R16				Y				
	235/60R16			W(28)		H(6)/Y(6)			
	215/60R17				H				
	225/60R17							V(22)	
	235/60R17					H(6)			
55 series	165/55R14			V(23)					
	165/55R15			V(23)					
	175/55R15			V(23)				T	T(18)
	185/55R15			V(28)	H				T(18)
	195/55R15			W(24)	H/V				
	195/55R15XL								
	175/55R16			W(28)					
	195/55R16			V/W	H/V	V(6)			
	205/55R16	W		V(11/23/28)/W(11/23/28)/Z(4)	H/V/W	H(6)/V(6)			
	205/55R16XL				H/V	V(6)			
	215/55R16	V			H/V/W/Y	H(6)/V(6)/W(6)			
	215/55R16XL				H/W/Y	V(6)			
	225/55R16			V(28)	V/W/Y				
	225/55R16XL				Y				
	175/55R17			W(28)					
	215/55R17				W	V(27)			
	225/55R17				Y				
	225/55R17XL	Y			W				
	235/55R17			Y(28)	W	Y(6)			
	235/55R18							V(22)	
50 series	165/50R15			V(28)					
	195/50R15				H/V	H(6)/V(6)			T(18)
	205/50R15			V(28)					
	205/50R16		V	V(24)	H/W				
	215/50R16			W(24)					
	225/50R16	W		Z(3/4)	V/W	V(6)/W(6)			
	205/50R17			V(28)/Z(1/4/5)	W				
	205/50R17XL	Y			W				
	215/50R17	W		Z(3)	W				
	225/50R17	W			W				
	225/50R17XL	Y				V(26)			
	245/50R17								
	225/50R18	W							
	235/50R18					W(27)			
	235/50R18XL			Y(28)					
	245/50R18					W(6)			
45 series	195/45R16	V							
	195/45R16XL	V							
	205/45R16				W	H(6)/W(6)			H(18)
	205/45R16XL				W				

(1) S01L & S01R - (2) S03PP - (3) S01 - (4) S02PP - (5) S02A - (6) ER30 - (7) B330EVO - (8) B330 - (9) S381 - (10) B391 - (11) RE720 - (12) B381 - (13) B390 - (14) SF226 - (15) GR01 - (16) ER20 - (17) RE88 - (18) B340 - (19) RE080 - (20) B371 - (21) RE070 - (22) RE031 - (23) RE030 - (24) RE010 - (25) ER31 - (26) ER370 - (27) ER33 - (28) RE040

Tyre Size Chart PSR

		RE050A			RE050		Other		ER300		Other		B250		Other	
aspect ratio	tyre size	potenza			turanza		B-series									
45 series	215/45R16															
	245/45R16															
	205/45R17	W														
	205/45R17XL	V/W														
	215/45R17	W/Y	V/W		W(28)/Z(28)	W		W(6)								
	215/45R17RFD		W													
	215/45R17XL		V													
	225/45R17	V/W/Y	W/Y		W(11/28)/	W		W(6)							W(21)	
	225/45R17XL	V/Y			W(28)											
	235/45R17	W/Y	Y													
	235/45R17XL	W														
	245/45R17	Y	W													
	245/45R17XL	Y														
	255/45R17				Y(3)/Z(1)											
	215/45R18	W			Y(5)											
	215/45R18XL	Y														
	225/45R18	W/Y			W(28)											
	225/45R18XL	Y			Y(28)											
	235/45R18	Y														
	235/45R18XL	Y														
	245/45R18	W	Y		W(28)			W(27)								
	245/45R18XL	W	Y													
	255/45R18	Y	Y		Y(28)											
	255/45R18XL				Y(28)											
	275/45R18		Y													
	245/45R19	Y						Y(27)								
	245/45R19XL							Y(27)								
40 series	205/40R17	Y			W(28)											
	205/40R17XL	W														
	215/40R17	Y														
	215/40R17XL	Y														
	235/40R17	Y														
	245/40R17	W/Y	W/Y													
	255/40R17	Y			Z(1/4/5)											
	285/40R17				Y(3)											
	205/40R18															
	215/40R18															
	225/40R18	Y	Y		Z(3/4/5)/Y(28)			Y(27)								
	225/40R18XL	W/Y														
	235/40R18	Y			Z(28)											
	235/40R18XL	Y														
	245/40R18	Y			Y(4)											
	255/40R18	W/Y	Y					Y(27)								
	255/40R18XL	Y														
	265/40R18		Y		Z(1)											
	265/40R18XL	Y	Y													
	275/40R18	Y			Y(5)											
	285/40R18		Y													
	225/40R19	W														
	225/40R19XL	Y														
	235/40R19	Y														
	245/40R19	Y														

(1) S01L & S01R - (2) S03PP - (3) S01 - (4) S02PP - (5) S02A - (6) ER30 - (7) B330EVO - (8) B330 - (9) S381 - (10) B391 - (11) RE720 - (12) B381 - (13) B390 - (14) SF226 - (15) GR01 - (16) ER20 - (17) RE88 - (18) B340 - (19) RE080 - (20) B371 - (21) RE070 - (22) RE031 - (23) RE030 - (24) RE010 - (25) ER31 - (26) ER370 - (27) ER33 - (28) RE040

Tyre Size Chart PSR

aspect ratio	tyre size	RE050A			RE050		Other		ER300		Other		B250		Other	
		potenza			turanza		B-series									
40 series	245/40R19XL	Y														
	255/40R19XL		Z	Y(28)												
	275/40R19	Y														
	275/40R19XL		Z													
	285/40R19	Y														
	245/40R20	Y														
35 series	275/35R17			Z(3)												
	245/35R18															
	245/35R18XL	Y														
	255/35R18	Y		Y(28)												
	255/35R18XL	Y														
	265/35R18	Y		Y(4)/Z(4/5)												
	275/35R18	Y														
	285/35R18	W														
	295/35R18	Y														
	225/35R19	Y														
	225/35R19XL															
	235/35R19	Y														
	245/35R19	Y														
	255/35R19	Y														
	255/35R19XL	Y														
	265/35R19	Y														
	275/35R19	Y														
	285/35R19	Y														
	345/35R19	Y														
	245/35R20															
	245/35R20XL	Y														
	255/35R20XL	Y														
	265/35R20XL	Y														
	275/35R20	Y														
	305/35R20															
30 series	285/30R18	Y		Z(4/5)												
	295/30R18XL			Z(5)												
	255/30R19XL															
	275/30R19XL	Y														
	285/30R19XL	Y														
	295/30R19XL	Y														
	305/30R19	Y														
	305/30R19XL	Y														
	275/30R20XL	Y														
	285/30R20XL	Y														

(1) S01L & S01R - (2) S03PP - (3) S01 - (4) S02PP - (5) S02A - (6) ER30 - (7) B330EVO - (8) B330 - (9) S381 - (10) B391 - (11) RE720 - (12) B381 - (13) B390 - (14) SF226 - (15) GR01 - (16) ER20 - (17) RE88 - (18) B340 - (19) RE080 - (20) B371 - (21) RE070 - (22) RE031 - (23) RE030 - (24) RE010 - (25) ER31 - (26) ER370 - (27) ER33 - (28) RE040

Tyre Size Chart RFT & MO Ext

		ER300 RFT	RE050 RFT	RE050 EXT	RE050A RFT	RE050A EXT	LM25 RFT	LM25 EXT	LM22 RFT	BLIZZAK RFT	MZ03 RFT	D-SPORT RFT	D400 RFT	ER30 EXT	LM25-4 RFT	LM25-4 EXT
aspect ratio	tyre size	Car Summer					Car Winter					4x4 Summer			4x4 Winter	
55 series	195/55R16	H/V/H(1)					H			Q						
	205/55R16	H/V/W					H			Q						
	205/55R16	H(1)/V(1)/W(1)														
	205/55R16 XL	V					H									
	215/55R16 XL	V														
	235/55R17															
	255/55R18 XL												H		H	H
50 series	235/55R19														V	V
	225/50R16		V/V(5)/W(5)				H									
	205/50R17				W/V(6)/W(6)		V									
	225/50R17		W/Y				H		H	Q						
	245/50R17		W				H									
	245/50R18						H									
	255/50R19															
45 series	255/50R19 XL		W(3)									V/W	H		W	V H
	205/45R17						V									
	215/45R17			V												
	225/45R17			W	W/V(7)/W(7)/Y(7)		H		V							
	225/45R17 XL						V									
	235/45R17		Z(8)													
	245/45R17		W/Y		Y											
40 series	245/45R17 XL						V									
	245/45R18		W(4)/Y	Y	W / Y		V									
	245/45R18 XL		H													
	285/45R19 XL											V/W				
	245/40R17			W												
	255/40R17		Z(8)		V(7)/W(7)											
	205/40R18				W											
35 series	215/40R18				Y											
	225/40R18				W											
	245/40R18	Y(2)/Z(2)	Z(4)		W/Y						Q					
	255/40R18					Y		V								
	265/40R18			Y												
	275/40R18		W(4)		W											
	285/40R18		Y													
30 series	245/40R19				W/Y											
	285/40R19				Y											
	255/40R20						V									
	275/40R20 XL											W				
	245/35R18				Y											
	255/35R18				W											
	275/35R18				W/Y											
25 series	285/35R18					Y										
	225/35R19 XL				Y											
	275/35R19				W											
	245/35R20				Y											
	285/35R20						V									
	305/35R20				Y											
	315/35R20 XL											W				
30 series	255/30R19 XL				Y											

Tyre Size Chart PXR

		Blizzak LM-20 Blizzak LM-25 Blizzak LM-18 Blizzak LM-22 Blizzak Nordic Noranza 2					
aspect ratio	tyre size	lamellen				nordic	
80 series	145/80R13			Q			
	155/80R13			Q			Q(1)
	145/80R14			Q			
	165/80R14			Q			
	175/80R14			T			
70 series	155/70R13	T					T(1)
	165/70R13	T					T(1)
	175/70R13	T				R	T(1)
	165/70R14	T					T(1)
	175/70R14	T					T
	185/70R14	T				R	
	185/70R14XL						T
	195/70R14	T					
	195/70R14RFD			T			
	195/70R15RFD			S			
65 series	175/65R13	T					
	155/65R14	T					
	165/65R14	T					
	175/65R14	T				R	
	175/65R14XL	T					T
	185/65R14	T				R	
	185/65R14XL						T
	145/65R15			T			
	165/65R15	T					
	175/65R15			T			
	185/65R15	T				R	
	185/65R15XL	T					T
	195/65R15		T/H			R	
	195/65R15XL		T				T
	205/65R15		T/H			R	
	205/65R15XL						T
	215/65R15		H				
	215/65R15XL						T
	195/65R16		H				
	195/65R16XL						T
	215/65R16XL						T
60 series	165/60R14	T					
	185/60R14	T				R	
	155/60R15	T					
	185/60R15	T				R	
	185/60R15XL	T					T
	195/60R15	T				R	
	195/60R15XL						T
	205/60R15		T/H				
	225/60R15		H				
	195/60R16		H				
	195/60R16XL						T
	205/60R16		H				
	205/60R16XL		H			R	T
	215/60R16XL		H			R	T
	225/60R16		H				
	225/60R16XL						T

(1) Noranza

Tyre Size Chart PXR

		Blizzak LM-20 Blizzak LM-25 Blizzak LM-18 Blizzak LM-22 Blizzak Nordic Noranza 2					
aspect ratio	tyre size	lamellen				nordic	
60 series	235/60R16			H			
	225/60R17			H			
55 series	185/55R14	T					
	165/55R15						
	175/55R15			T			
	185/55R15	T	T/H			R	
	185/55R15XL						T
	195/55R15		H				
	195/55R15XL					R	T
	185/55R16XL		T				T
	195/55R16		T/H			R	
	205/55R16		T/H				
	205/55R16XL		H/V			R	T
	215/55R16		H				
	215/55R16XL		H/V			R	T
	225/55R16		H				
	225/55R16XL		H/V			R	T
	205/55R17		V				
	215/55R17XL		V				T
	225/55R17XL		V			R	T
	235/55R17				V		
50 series	165/50R15						
	195/50R15		T/H				
	195/50R16		H				
	205/50R16		H				
	225/50R16						
	205/50R17		H				
	205/50R17XL		V				T
	215/50R17		H				
	225/50R17		H				
	225/50R17XL		V			R	
	235/50R17				V		
	245/50R17						
	235/50R18		V				
	235/50R18XL				V		
45 series	205/45R16		H				
	205/45R17						
	205/45R17XL		V				
	215/45R17		H				
	215/45R17XL		V			R	
	225/45R17		H				
	225/45R17XL		V			R	T
	235/45R17		H				
	235/45R17XL		V				T
	245/45R17XL		V				
	215/45R18XL				V		
	225/45R18XL		V				
	235/45R18XL		V				
	245/45R18						
	245/45R18XL		V				

(1) Noranza

Tyre Size Chart PXR

		Blizzak LM-20 Blizzak LM-25 Blizzak LM-18 Blizzak LM-22 Blizzak Nordic Noranza 2					
aspect ratio	tyre size	lamellen				nordic	
40 series	255/45R18XL				V		
	245/45R19		V				
	205/40R17XL		H				
	215/40R17				V		
	245/40R17				H		
	255/40R17XL		V				
	225/40R18XL		V				T
	235/40R18XL		V				
	245/40R18						
	245/40R18XL		V				
	255/40R18						
	255/40R18XL		V				
	225/40R19XL		V				
	255/40R19XL				V		
	255/40R20						
35 series	255/35R18XL		V				
	265/35R18XL		V				
	255/35R19XL		V				
	285/35R20						

(1) Noranza

Tyre Size Chart 4x4

aspect ratio	tyre size	Dueler Sport		Dueler 680 & Other		Dueler D683		Dueler D689		Other		Dueler D694		Dueler D673		LM25 4x4		Dueler DM23	
		H/P	H/L	H/T		A/T	M/T	winter											
85 series	235/85R16						Q												
82 series	195/82R15				S	R(3)													
	205/82R16C				Q/R	R(4)/S(4)	S												
80 series	195/80R15					S(3)	T											Q	
	215/80R15		T		S		S											Q	
	225/80R15																	Q	
	175/80R16																	Q	
	205/80R16				S/T														
	205/80R16RFD																	Q	
	205/80R16XL													T					
	215/80R16						S											Q	
	215/80R16RFD				S														
	235/80R16				S														
75 series	215/75R15						T					S							
	225/75R15						T												
	225/75R15C						S(2)												
	235/75R15				S/T							S		T					
	235/75R15XL						T							T					
	225/75R16		T				S					S		T					
	245/75R16					S(4)	S												
	265/75R16						S					S							
	285/75R16						R												
70 series	165/70R14						T(12)												
	205/70R15					S(3/5)/T(3)/H(3)	T							T				Q	
	225/70R15					S(5)	T											Q	
	235/70R15						S											Q	
	255/70R15				S/R													L	
	255/70R15C					S(4)													
	265/70R15	H			S/H		S							T				Q	
	215/70R16					H(5)	S							T				Q	
	225/70R16					S(5)/T(5)/H(5)	S											Q	
	225/70R16XL													T/H					
	235/70R16				S/T/H	T(4/5)/H(4)	T							T				Q	
	245/70R16	H	T		S		T							T				Q	
	245/70R16RFD				S	S(4)	S(2)												
	245/70R16XL													T					
	255/70R16				T	S(4)	S							T				Q	
	265/70R16	H	T		R/S/H	S(4)	T							T				Q	
	275/70R16	H					S											Q	
	225/70R17RFD					S(4)												Q	
	255/70R18					S(4)													
65 series	185/65R14					T(3)													
	205/65R16					T(3)													
	215/65R16	H/V			S/H	T(3)/H(5)/S(6)/V(5)	T							T/H				Q	
	215/65R16XL	H																	
	255/65R16	H			T		S(2)							T/H				Q	
	225/65R17					S(5)/H(5)								H				Q	
	235/65R17	V				H(3)								H					
	235/65R17RFD																	Q	
	235/65R17XL	V	V(9)											H					
	245/65R17			H	T									H					
	245/65R17RFD					S(4)													

(1) D686 - (2) D693 - (3) D684 - (4) D640 - (5) D687 - (6) D688 - (7) RD-610 - (8) EL42 - (9) ER30 - (10) H/L400 - (11) D684 II - (12) D693 II

Tyre Size Chart 4x4

		Dueler Sport	Dueler 680 & Other	Dueler 683	Dueler Alenza & others	Dueler D689	Other	Dueler D694	Dueler D 673	LM25 4x4	Dueler DM23
aspect ratio	tyre size	H/P		H/L			H/T	A/T	M/T	winter	
65 series	255/65R17				T(10)		S(4)/H(4)	T		H	Q
	265/65R17						T(4)/H(4)				
	275/65R17										
	235/65R18									H	Q
	265/65R18			H			S(11)				
60 series	255/60R15		H(1)								
	275/60R15		H(1)								
	235/60R16	H	H(9)				H(5)				Q
	215/60R17	H	H(8)							H	Q
	225/60R17										Q
	235/60R17		H(9)							H	
	255/60R17	H/V					T(4)			H	
	235/60R18	V									
	235/60R18XL									H	Q
	255/60R18						H(4)				
	255/60R18XL	V								H	Q
	265/60R18						H(4)			H	Q
	275/60R18						H(3)			H	Q
	285/60R18	V					V(11)				Q
55 series	225/55R17	W								H	
	235/55R17		H(8)							H	
	235/55R17XL										Q
	255/55R17									H	
	275/55R17	V								H	
	225/55R18	V								V	Q
	235/55R18						H(5)			H	Q
	255/55R18		V(8)								
	255/55R18XL	Y	Y(9)							H/V	Q
285/55R18	V										
50 series	235/50R18		H(8)							H	
	285/50R18	W									
	255/50R19	V	V(9)/W(9)								
	255/50R19XL	Y								V	Q
	265/50R19XL	Y								V	
	255/50R20XL	V									
45 series	275/45R19XL	Y									
	285/45R19	V	V(9)/W(9)								
	285/45R19XL										
	275/45R20XL	Y								V	
	285/45R22				H						
40 series	275/40R20	W									
	275/40R20XL	Y									
35 series	315/35R20	W									
	315/35R20XL										
Misc.	9.5R15LT							S			Q
	10R15						N(7)				
	10.5R15LT					R		S	S		Q
	11.5R15LT								Q		
	12.5R15LT								Q		
	7.5R16							N			

(1) D686 - (2) D693 - (3) D684 - (4) D840 - (5) D687 - (6) D688 - (7) RD-610 - (8) EL42 - (9) ER30 - (10) H/L400 - (11) D684 II - (12) D693 II

Tyre Size Chart CVR & CXR

		Duravis R410 Duravis R630 Other Blizzak W800 Blizzak LM-18C M723 Noranza Van Blizzak W965 RD713P								
aspect ratio	tyre size	summer			winter			nordic		
82 series	155/82R12C			R(3)						N
	145/82R13C			N(2)			N			N
	155/82R13C			N(2)						
	165/82R14C						N			
	175/82R14C		R							
	185/82R14C		R		R				N	Q
	195/82R14C		R	Q(2)	R				N	Q
	185/82R15C		R							
	195/82R15C			R(3)						N
	205/82R16C									N
80 series	165/80R13RFD	R								
75 series	175/75R14C		R/T		R					
	185/75R14C		R							
	205/75R14			Q(2)						
	175/75R16C		R							
	185/75R16C		R	R(3)			P			
	195/75R16C		R		R			R	N	
	205/75R16C		R		R			R	N	
	215/75R16			N(5)						
	215/75R16C		Q/R	R(3)	Q/R					
	225/75R16C			N(5)			N			
70 series	165/70R13RFD	R								
	165/70R14RFD	R								
	165/70R14C	R				R				
	195/70R15C		R	R(3)/S(2)	R		R	R	N	Q
	205/70R15			Q(3)/S(3)						
	205/70R15C		R		R					
	215/70R15C		R/S	S(3)	R					
	225/70R15C		R/S	R(3)	R		R	R	N	
65 series	175/65R14RFD	T								
	175/65R14C	T				T		R		
	185/65R15RFD	T								
	205/65R15C	T				T				
	215/65R15C	T								
	195/65R16C	T	R		R/T			R		
	205/65R16C	T	R/T		R/T			R	Q	
	215/65R16C	T/H	R		R	T		R	Q	
	225/65R16C		R		R			R		
	235/65R16C		R		R			R		
60 series	195/60R16C			H(1)		T				
	205/60R16C					T				
	215/60R16C	T				T				
	225/60R16XL	H								
55 series	205/55R16C			H(1)		T(6)				

(1) ER30C - (2) RD613 - (3) RD623 - (4) R294 - (5) LM22C



PASSENGER
SUMMER - WARRANTY

State of the art Assymetric Pattern driving precision from Formula One technology. Response and control beyond your dreams with a good level of comfort and low noise. Superb wet grip provides ultimate safety.

Chosen by many leading car manufacturers for high-performance models, including: Alfa Romeo 147 (standard version, GTA & GT Coupe), 159, GT & Brera, AMG C-Class, S-Class, CLS 55 & SL 55, Aston Martin V8 Vantage, DB9 & DB9 Volante, Audi A4, A6, S6 & TT, BMW 1-Series, 3-Series, 5-Series, 6-Series & Z4, Ferrari Enzo, 575-Maranello Superamerica, F430 & Scaglietti 612, Honda S2000, Lexus IS 250/350, Mercedes-Benz A-Class, B-Class, C-Class, E-Class armoured, S-Class armoured, New-S-Class, CLK-Class, SLK-Class, SL55 & SL65, Maserati Quattroporte, Mitsubishi Lancer Evolution 8, Opel Astra & Zafira, Porsche 911, Cayman & Boxster, Seat Altea, Leon-&Toledo, Subaru Impreza & Legacy, Volkswagen Cabrio EOS, Golf 5, Golf GTI, Golf Plus & Passat.



55 Series	215 / 55 R 16	93	V	7J	642	226	295	1958
50 Series	215 / 50 R 17	91	W	7J	648	226	300	1976
	225 / 50 R 17	94	W	7J	658	233	304	2006
	225 / 50 R 17	98 XL	Y	7J	658	233	304	2006
	225 / 50 R 18	94	W	7J	683	233	316	2083
	225 / 50 R 18	94	W	7J	683	233	316	2083
45 Series	195 / 45 R 16	84 XL	V	6 1/2J	582	195	271	1775
	205 / 45 R 17	84	W	7J	616	206	287	1878
	205 / 45 R 17	88 XL	V/W	7J	616	206	287	1878
	215 / 45 R 17	87	W/Y	7J	626	213	291	1909
	225 / 45 R 17	91	V/W	7 1/2J	634	225	294	1933
	225 / 45 R 17	91	Y	7 1/2J	634	225	294	1933
	225 / 45 R 17	94 XL	V	7 1/2J	634	225	294	1933
	235 / 45 R 17	93	W	8J	644	236	298	1964
	235 / 45 R 17	97 XL	W	8J	644	236	298	1964
	245 / 45 R 17	95	Y	8J	652	243	301	1988
	245 / 45 R 17	99 XL	Y	8J	652	243	301	1988
	215 / 45 R 18	89	W	7J	651	213	304	1985
	215 / 45 R 18	93 XL	Y	7J	651	213	304	1985
	225 / 45 R 18	91	W	7 1/2J	669	225	307	2009
	225 / 45 R 18	95 XL	Y	7 1/2J	669	225	307	2009
	235 / 45 R 18	94	Y	8J	669	236	311	2040
	235 / 45 R 18	98 XL	Y	8J	669	236	311	2040
	245 / 45 R 18	96	W	8J	677	243	314	2064
	245 / 45 R 18	100 XL	W	8J	677	243	314	2064
40 Series	245 / 40 R 17	91	W	8 1/2J	628	248	292	1915
	245 / 40 R 17	91	Y	8 1/2J	628	248	292	1915
	225 / 40 R 18	88	Y	8J	637	230	298	1942
	225 / 40 R 18	92 XL	W/Y	8J	637	230	298	1942
	235 / 40 R 18	91	Y	8 1/2J	645	241	301	1967

Rolling Circumference $\pm$ 2%



	235 / 40 R 18	95 XL	Y	8 1/2J	645	241	301	1967
	245 / 40 R 18	93	Y	8 1/2J	653	248	304	1991
	255 / 40 R 18	95	W/Y	9J	661	260	308	2016
	255 / 40 R 18	99 XL	Y	9J	661	260	308	2016
	265 / 40 R 18	101 XL	Y	9 1/2J	669	271	311	2040
	275 / 40 R 18	99	Y	9 1/2J	677	278	314	2064
	225 / 40 R 19	89	W	8 1/2J	671	241	314	2046
	235 / 40 R 19	92	Y	8 1/2J	671	241	314	2046
	245 / 40 R 19	94	Y	8 1/2J	679	248	317	2070
	245 / 40 R 19	98 XL	Y	8 1/2J	679	248	317	2070
	285 / 40 R 19	103	Y	10J	711	290	330	2168
35 series	285 / 35 R 18	97	W	10J	657	290	306	2003
	295 / 35 R 18	99	Y	10 1/2J	663	301	308	2022
	225 / 35 R 19	84	Y	8J	641	230	303	1955
	235 / 35 R 19	87	Y	8 1/2J	647	241	305	1973
	245 / 35 R 19	89	Y	8 1/2J	655	248	308	1997
	255 / 35 R 19	92	Y	9J	661	360	310	2016
	255 / 35 R 19	96 XL	Y	9J	661	260	310	2016
	265 / 35 R 19	94	Y	9 1/2J	669	271	314	2040
	275 / 35 R 19	96	Y	9 1/2J	675	278	316	2058
	285 / 35 R 19	99	Y	10J	683	290	319	2083
	345 / 35 R 19	110	Y	12J	725	350	335	2211
	245 / 35 R 20	95 XL	Y	8 1/2J	680	248	321	2074
	265 / 35 R 20	99 XL	Y	9 1/2J	694	271	326	2116
30 series	285 / 30 R 19	98 XL	Y	10J	655	290	308	1997
	295 / 30 R 19	100 XL	Y	10 1/2J	661	301	310	2016
	305 / 30 R 19	98	Y	11J	667	313	313	2034
	305 / 30 R 19	102 XL	Y	11J	667	313	313	2034
	275 / 30 R 20	97 XL	Y	9 1/2J	674	278	318	2055

Rolling Circumference $\pm$ 2%

State of the art Directional Pattern. Driving precision derived from Formula One technology. Response and control beyond your dreams with a good level of comfort and low noise. Superb wet grip provides ultimate safety.

Chosen by many leading car manufacturers for high-performance models, including: Alfa Romeo 147 (standard version, GTA & GT Coupe), 159, GT & Brera, AMG C-Class, S-Class, CLS 55 & SL 55, Aston Martin V8 Vantage, DB9 & DB9 Volante, Audi A4, A6, S6 & TT, BMW 1-Series, 3-Series, 5-Series, 6-Series & Z4, Ferrari Enzo, 575-Maranello Superamerica, F430 & Scaglietti 612, Honda S2000, Lexus IS 250/350, Mercedes-Benz A-Class, B-Class, C-Class, E-Class armoured, S-Class armoured, New-S-Class, CLK-Class, SLK-Class, SL55 & SL65, Maserati Quattroporte, Mitsubishi Lancer Evolution 8, Opel Astra & Zafira, Porsche 911, Cayman & Boxster, Seat Altea, Leon-&Toledo, Subaru Impreza & Legacy, Volkswagen Cabrio EOS, Golf 5, Golf GTI, Golf Plus & Passat.



50 Series	205 / 50 R 16	87	V	6 1/2J	612	214	283	1866
45 Series	215 / 45 R 17	87	V/W	7J	626	213	291	1909
	215 / 45 R 17	91 RFD	W	7J	626	213	291	1909
	215 / 45 R 17	91 XL	V	7J	626	213	291	1909
	225 / 45 R 17	90	W	7 1/2J	634	225	294	1933
	225 / 45 R 17	91	W/Y	7 1/2J	634	225	294	1933
	235 / 45 R 17	94	Y	8J	644	236	298	1964
	245 / 45 R 17	95	W	8J	652	243	301	1988
	245 / 45 R 18	96	Y	8J	677	243	314	2064
	245 / 45 R 18	100 XL	Y	8J	677	243	314	2064
	255 / 45 R 18	99	Y	8 1/2J	687	255	318	2095
40 Series	275 / 45 R 18	103	Y	9J	705	273	325	2150
	245 / 40 R 17	91	W/Y	8 1/2J	628	248	292	1915
	225 / 40 R 18	88	Y	8J	637	230	298	1942
	255 / 40 R 18	95	Y	9J	661	260	308	2016
	265 / 40 R 18	97	Y	9 1/2J	669	271	311	2040
	265 / 40 R 18	101 XL	Y	9 1/2J	669	271	311	2040
	285 / 40 R 18	101	Y	10J	685	290	317	2089
	255 / 40 R 19	96	Z	9J	687	260	321	2095
	275 / 40 R 19	103 XL	Z	9 1/2J	677	278	317	2065

Rolling Circumference $\pm 2\%$

Proven as Original Equipment for leading high performance cars, such as Audi A8, TT, VW Phaeton. Specially suitable for the comfort oriented sports cars. It delivers enhanced wet and dry performance without sacrificing good ride comfort and low pattern noise.



60 Series	235 / 60 R 16	100	W	7J	688	240	312	2098
55 Series	185 / 55 R 15	81	V	6J	585	194	270	1784
	185 / 55 R 15	82	V	6J	585	194	270	1784
	175 / 55 R 16	80	V/W	5 1/2J	598	182	277	1832
	205 / 55 R 16	91	V/W	6 1/2J	632	214	291	1927
	225 / 55 R 16	95	V	7J	654	233	299	1994
	175 / 55 R 17	81	W	5 1/2J	624	182	290	1903
	235 / 55 R 17	99	Y	7 1/2J	690	245	316	2104
50 Series	165 / 50 R 15	73	V	5J	547	170	255	1668
	205 / 50 R 15	85	V	6 1/2J	587	214	270	1790
	205 / 50 R 17	89	V	6 1/2J	638	214	296	1945
	235 / 50 R 18	101 XL	Y	7 1/2J	693	245	320	2113
45 Series	215 / 45 R 16	86	W	7J	600	213	278	1830
	205 / 45 R 17	84	W	7J	616	206	287	1878
	215 / 45 R 17	87	W/Z	7J	626	213	291	1909
	225 / 45 R 17	90	W	7 1/2J	634	225	294	1933
	225 / 45 R 17	94 XL	W	7 1/2J	634	225	294	1933
	225 / 45 R 17	91	W/Y/Z	7 1/2J	634	225	294	1933
	225 / 45 R 18	91	W	7 1/2J	659	225	307	2009
	225 / 45 R 18	95 XL	Y	7 1/2J	659	225	307	2009
	245 / 45 R 18	96	W	8J	677	243	314	2064
	255 / 45 R 18	99	Y	8 1/2J	687	255	318	2095
40 Series	255 / 45 R 18	103 XL	Y	8 1/2J	687	255	318	2095
	205 / 40 R 17	80	W	7 1/2J	596	212	279	1817
	225 / 40 R 18	88	Y	8J	637	230	298	1942
	235 / 40 R 18		Z	8 1/2J	645	241	302	1967
35 Series	255 / 40 R 19	100 XL	Y	9J	687	260	321	2095
	255 / 35 R 18	90	Y	9J	635	260	297	1936

Rolling Circumference $\pm 2\%$

POTENZA RE88

PSR Warranty

For Honda Civic, Mitsubishi Galant, ...



65 Series	195 / 65 R 14	89	V	6J	610	201	277	1860
60 Series	175 / 60 R 14	79	H	5J	566	177	259	1726
	195 / 60 R 15	88	H	6J	615	201	281	1875

Rolling Circumference $\pm$ 2%

POTENZA RE080

PSR Warranty

For Suzuki Swift and Kia Cerato



60 Series	185 / 60 R 15	84	H	5 1/2J	603	189	277	1839
	195 / 60 R 15	88	H	6J	615	201	281	1875

Rolling Circumference $\pm$ 2%

For Honda Civic, Daihatsu Cuore/YRV and Lexus IS200/250.



55 Series	165 / 55 R 14	72	V	5J	538	170	248	1640
	165 / 55 R 15	75	V	5J	538	170	251	1717
	175 / 55 R 15	77	V	5 1/2J	573	182	265	1747
	205 / 55 R 16	89	V/W	6 1/2J	632	214	291	1927

For Lexus Rx300
Rx350
Rx400H

60 Series	225 / 60 R 17	99	V	6 1/2J	702	228	321	2141
55 Series	235 / 55 R 18	99	V	7 1/2J	715	245	329	2180

Rolling Circumference $\pm 2\%$

For Subaru Impeza and Honda Integra (Type R).



55 Series	195 / 55 R 15	85	W	6J	595	201	273	1814	
50 Series	205 / 50 R 16	87	V	6 1/2J	612	214	283	1866	
	215 / 50 R 16	90	W	7J	622	226	287	1897	

Rolling Circumference $\pm 2\%$

POTENZA RE070

PSR Warranty

For Subaru Impreza



45 Series	225 / 45 R 17	90	W	7 1/2J	634	225	294	1933	

Rolling Circumference $\pm 2\%$

For Porsche 993, 996 and Aston-Martin DB7



55 Series	205 / 55 R 16		Z	6 1/2J	632	214	291	1927
50 Series	225 / 50 R 16		Z	7J	632	233	291	1927
	205 / 50 R 17		Z	6 1/2J	638	214	296	1945
45 Series	245 / 45 R 16		Z	8J	626	243	288	1909
	225 / 45 R 17		Z	7 1/2J	634	225	294	1933
40 Series	255 / 40 R 17		Z	9J	636	260	295	1939
	225 / 40 R 18		Z	8J	637	230	298	1942
	245 / 40 R 18	93	Y	8 1/2J	653	248	304	1991
35 Series	265 / 35 R 18	93	Y	9 1/2J	643	271	301	1961
	265 / 35 R 18		Z	9 1/2J	643	271	301	1961
30 Series	285 / 30 R 18		Z	10J	629	290	295	1918

Rolling Circumference $\pm 2\%$

The S-02A offers uncompromising performance for drivers of the world's most powerful sports cars, confirmed by OEMs such as Porsche 996, Boxster and Ferrari 360 Modena.



50 Series	205 / 50 R 17		Z	6 1/2J	638	214	296	1945
45 Series	215 / 45 R 18	89	Y	7J	651	213	304	1985
40 Series	255 / 40 R 17		Z	9J	636	260	295	1939
	225 / 40 R 18		Z	8J	637	230	298	1942
	275 / 40 R 18	99	Y	9 1/2J	677	278	314	2064
35 Series	265 / 35 R 18		Z	9 1/2J	643	271	301	1961
30 Series	285 / 30 R 18		Z	10J	629	290	295	1918
	295 / 30 R 18	XL	Z	10 1/2J	635	301	297	1936

Rolling Circumference $\pm 2\%$

Excellent grip and handling on dry, from accelerating / braking until sharp cornering. The Expedia S-01 will ensure the satisfaction and fun for today's sporty drivers with their cars. Additional, unique technologies reduce even further the risk of aquaplaning and therefore increase the safety of drivers and their passengers.

For Porsche 911, 993, 968 & Ferrari 348, 355, 456.



50 Series	225 / 50 R 16			Z	7J	632	233	291	1927
	215 / 50 R 17			Z	7J	648	226	300	1976
45 Series	245 / 45 R 16			Z	8J	626	243	288	1909
	255 / 45 R 17	98		Y	8 1/2J	662	255	305	2019
40 Series	285 / 40 R 17	100		Y	10J	660	290	304	2013
	225 / 40 R 18			Z	8J	637	230	298	1942
35 Series	275 / 35 R 17			Z	9 1/2J	624	278	290	1903

Rolling Circumference $\pm 2\%$

Unidirectional asymmetrical pattern for high performance cars such as: Porsche 911 (993) & Ferrari 348, 355



								
50 Series	205 / 50 R 17	Z	6 1/2J	638	214	296	1945	
45 Series	255 / 45 R 17	Z	8 1/2J	662	255	305	2019	
40 Series	255 / 40 R 17	Z	9J	636	260	295	1939	
	265 / 40 R 18	Z	9 1/2J	669	271	311	2040	

Rolling Circumference ± 2%

Superb harmony of comfort and stability. Smooth drive reduces stress on long journeys of top-end touring cars. Premium wet handling for more safety.

Chosen by many leading car manufacturers for their latest models, including: Alfa Romeo 147, 156 & GT, Audi A4, A6 & TT, BMW 1-Series & 3-Series, Chrysler Sebring, Dodge Avenger, Fiat Bravo, Croma, Punto, Sedici & Stilo, Ford New Focus, Honda Civic, Lancia-Thesis, Mercedes-Benz E, C & S-Class, Opel Astra, Vectra & Zafira, Peugeot 1007, Renault Clio 3, Seat Altea, Leon & Toledo, Skoda Fabia, Octavia, Roomster Superb, Suzuki SX4, Volkswagen Cabrio EOS, Golf 5, Passat, Polo & Touran,...



65 Series	195 / 65 R 15	91	H/V	6J	635	201	289	1936	
60 Series	185 / 60 R 15	84	H	5 1/2J	603	189	277	1839	
	195 / 60 R 16	89	V	6J	640	201	294	1952	
	205 / 60 R 16	92	H/V	6J	652	209	298	1988	
	205 / 60 R 16	96 XL	W	6J	652	209	298	1988	
	215 / 60 R 16	95	W	6 1/2J	664	221	303	2025	
	215 / 60 R 17	96	H	6 1/2J	690	221	316	2104	
55 Series	185 / 55 R 15	82	H	6J	585	194	270	1784	
	195 / 55 R 15	85	H	6J	595	201	273	1814	
	195 / 55 R 16	87	H/V	6J	620	201	286	1891	
	205 / 55 R 16	91	H/V/W	6 1/2J	632	214	291	1927	
	205 / 55 R 16	94 XL	H/V	6 1/2J	632	214	291	1927	
	215 / 55 R 16	93	H/V/W/Y	7J	642	226	295	1958	
	215 / 55 R 16	97 XL	W/Y	7J	642	226	295	1958	
	225 / 55 R 16	95	W	7J	654	233	299	1994	
	225 / 55 R 16	99 XL	Y	7J	654	233	299	1994	
	215 / 55 R 17	94	W	7J	668	226	308	2037	
50 Series	235 / 55 R 17	99	W	7 1/2J	690	245	316	2104	
	225 / 50 R 16	92	V/W	7J	632	233	291	1927	
	215 / 50 R 17	91	W	7J	648	226	300	1976	
45 Series	205 / 45 R 16	83	W	7J	590	206	274	1799	
	205 / 45 R 16	87 XL	W	7J	590	206	274	1799	

Rolling Circumference $\pm$ 2%



For BMW, Mercedes, VW, Opel, Porsche, Mazda, Toyota, Ford, Peugeot, ...



65 Series	195 / 65 R 15	91	H/V	6J	635	201	289	1936
	205 / 65 R 15	94	V	6J	647	209	294	1973
60 Series	185 / 60 R 15	84	H	5 1/2J	603	189	277	1839
	195 / 60 R 15	88	H	6J	615	201	281	1875
	205 / 60 R 16	92	H	6J	652	209	298	1988
	215 / 60 R 16	95	H	6 1/2J	664	221	303	2025
	235 / 60 R 16	100	H/Y	7J	688	240	312	2098
	235 / 60 R 17	102	H	7J	714	240	325	2177
55 Series	195/ 55 R 16	87	V	6J	620	201	286	1891
	205 / 55 R 16	91	H/V	6 1/2J	632	214	291	1927
	205 / 55 R 16	94 XL	V	6 1/2J	632	214	291	1927
	215 / 55 R 16	93	H/V/W	7J	642	226	295	1958
	215 / 55 R 16	97 XL	V	7J	642	226	295	1958
	235 / 55 R 17	99	Y	7 1/2J	690	245	316	2104
50 Series	195 / 50 R 15	82	H/V	6J	577	201	266	1759
	225 / 50 R 16	92	V/W	7J	632	233	291	1927
	245 / 50 R 18	100	W	7 1/2J	703	253	324	2144
45 Series	205 / 45 R 16	83	H/W	7J	590	206	274	1799
	215 / 45 R 17	87	W	7J	626	213	291	1909
	225 / 45 R 17	91	W	7 1/2J	634	225	294	1933

Rolling Circumference $\pm 2\%$

Turanza ER31

PSR Warranty

For Opel Vectra



65 Series	195 / 65 R 15	91	H/V	6J	635	201	289	1936

Rolling Circumference $\pm 2\%$

Turanza ER33

PSR Warranty

For Nissan Maxima and Lexus LS430, LS460, IS250/350 & SC430



55 Series	215 / 55 R 17	93	V	7J	668	226	308	2037
50 Series	235 / 50 R 18	97	W	7 1/2J	693	245	320	2113
45 Series	245 / 45 R 18	96	W	8J	677	243	314	2064
	245 / 45 R 19	98	Y	8J	703	243	327	2144
	245 / 45 R 19	102XL	Y	8J	703	243	327	2144
40 Series	225 / 40 R 18	88	Y	8J	637	230	298	1942
	255 / 40 R 18	95	Y	9J	661	260	308	2016

Rolling Circumference $\pm 2\%$

Turanza ER370

PSR Warranty

For Honda Accord

								
60 Series	205 / 60 R 16	92	V	6J	652	209	298	1988
50 Series	225 / 50 R 17	98XL	V	7J	658	233	304	2006

Rolling Circumference $\pm$ 2%

Regno GR01

PSR Warranty

For Daihatsu Move




								
65 Series	145 / 65 R 13	69	S	4 1/2B	518	150	238	1579

Rolling Circumference $\pm$ 2%

A good balance between comfort & stability, quietness & aquaplaning and performance & mileage.

Chosen by many leading car manufacturers, including: Kia - Grand Carnival, Fiat Punto, Mercedes-Benz B class, Nissan Micra & Note, Opel Astra, Renault Clio & Megane, Skoda Roomster, Toyota Yaris.

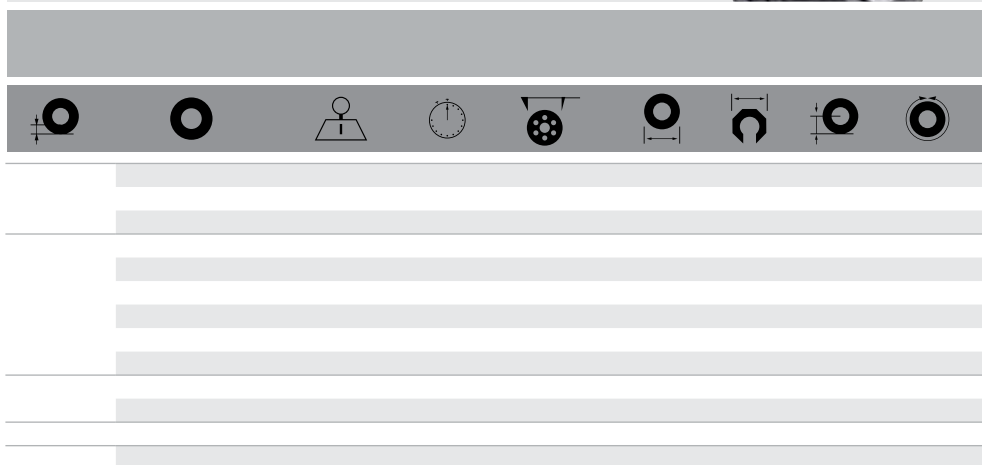

Rolling Circumference $\pm 2\%$



For Smart Fortwo and Roadster



65 Series	145 / 65 R 15	72	T	4 1/2J	569	150	263	1735
55 Series	175 / 55 R 15	77	T	5 1/2J	573	182	265	1747
	185 / 55 R 15	82	T	6J	585	194	270	1784
50 Series	195 / 50 R 15	82	T	6J	577	201	266	1759
45 Series	205 / 45 R 16	83	H	7J	590	206	274	1799

Rolling Circumference $\pm 2\%$

B371

For Nissan Micra and Suzuki Wagon R



60 Series	165 / 60 R 14	75	T/H	5J	554	170	255	1689

Rolling Circumference $\pm 2\%$

B381

For Audi A2



Rolling Circumference $\pm 2\%$

B390

PSR Warranty

For OE fitment of Mazda 323, Seat Leon & Toledo, Fiat Multipla, Renault Megane, Honda HRV, Ford Fusion, Toyota Corolla, VW Golf and Touran, etc....



70 Series	145 / 70 R 12	69	S	4 1/2B	509	150	232	1552
	195 / 70 R 15	92	S	6J	655	201	297	1997
65 Series	155 / 65 R 14	75	S	4 1/2J	558	175	256	1701
	185 / 65 R 14	86	H	5 1/2J	596	189	271	1817
	195 / 65 R 15	91	T/H/V	6J	635	201	289	1936
	195 / 65 R 15	95 RFD	T	6J	635	201	289	1936
	195 / 65 R 15	95 XL	H	6J	635	201	289	1936
	205 / 65 R 15	94	T	6J	647	209	294	1973
60 Series	195 / 60 R 15	88	T/H/V	6J	615	201	281	1875

Rolling Circumference $\pm 2\%$

For Toyota Yaris, Corolla, Nissan Micra, Almera, Honda Civic & Accord, Ford Fiesta, Lancia Y, etc...



								
80 Series	155 / 80 R 13	79	T	4 1/2B	578	157	261	1762
70 Series	165 / 70 R 14	81	T	5J	588	170	268	1793
	175 / 70 R 14	84	H	5J	602	177	273	1836
	175 / 70 R 14	88 RFD	T	5J	602	177	273	1836
	185 / 70 R 14	88	H	5 1/2J	616	189	279	1878
65 Series	165 / 65 R 14	79	S/T	5J	570	170	261	1738
	175 / 65 R 14	82	T	5J	584	177	266	1781
	185 / 65 R 14	86	T	5 1/2J	596	189	271	1817
	175 / 65 R 15	84	T	5J	609	177	279	1857
	185 / 65 R 15	88	H	5 1/2J	621	189	284	1894

Rolling Circumference $\pm 2\%$

SF 226

PSR Warranty

For Nissan Serena



70 Series	195 / 70 R 14	95 RFD	S	6J	630	201	284	1921

SF 381

PSR Warranty

For Mitsubishi Spacegear



82 Series	195/82 R 14	98 RFD	S	6J	666	198	298	2031

Rolling Circumference $\pm 2\%$



PASSENGER
SUMMER - RFT + EXT

For Ferrari 599, 612, BMW Z4, 1, 5 & 6 series, Audi A4, A5 & TT, Mini



50 Series	205 / 50 R 17	89	W	6 1/2J	638	214	296	1945	
45 Series	225 / 45 R 17	91	W	7 1/2J	634	225	294	1933	
	245 / 45 R 17	95	Y	8J	652	243	301	1988	
	245 / 45 R 18	96	W/Y	8J	677	243	314	2064	
40 Series	205 / 40 R 18	82	W	7 1/2J	621	212	292	1894	
	215 / 40 R 18	85	Y	7 1/2J	629	218	295	1918	
	225 / 40 R 18	88	W	8J	637	230	298	1942	
	245 / 40 R 18	93	W/Y	8 1/2J	653	248	304	1991	
	275 / 40 R 18	99	W	9 1/2J	677	278	314	2064	
	245 / 40 R 19	94	W/Z	8 1/2J	679	248	317	2070	
	285 / 40 R 19	103	Y	10J	711	290	330	2168	
35 Series	245 / 35 R 18	88	Y	8 1/2J	629	248	295	1918	
	255 / 35 R 18	90	W	9J	635	260	297	1936	
	275 / 35 R 18	95	W/Y	9 1/2J	649	278	303	1979	
	225 / 35 R 19	88 XL	Y	8J	641	230	303	1955	
	275 / 35 R 19	96	W	9 1/2J	675	278	316	2058	
	245 / 35 R 20	91	Y	8 1/2J	680	248	321	2074	
30 Series	305 / 35 R 20	104	Y	11J	722	313	337	2202	
	255 / 30 R 19	91 XL	Y	9J	637	260	301	1942	

Rolling Circumference $\pm 2\%$



POTENZA RE050-1 RFT

PSR RFT

For BMW 3 series



50 series	225 / 50 R 16	92	V/W	7J	632	233	291	1927

Rolling Circumference $\pm 2\%$

POTENZA RE050A1 RFT

PSR RFT

For BMW 1-series



50 series	205 / 50 R 17	89	V/W	6 1/2J	638	214	296	1945

Rolling Circumference $\pm 2\%$

POTENZA RE050A2 RFT

PSR RFT

For BMW 3 series



45 series	225 / 45 R 17	91	V/W/Y	7 1/2J	634	225	294	1933
40 series	255 / 40 R 17	94	V/W	9J	636	260	295	1939

Rolling Circumference $\pm 2\%$

POTENZA RE050 RFT

PSR RFT



50 series	225 / 50 R 16	92	V	7J	632	233	291	1927
	225 / 50 R 17	94	W/Y	7J	658	233	304	2006
	245 / 50 R 17	99	W	7 1/2J	678	253	311	2067
45 series	245 / 45 R 17	95	W/Y	8J	652	243	301	1988
	245 / 45 R 18	96	Y	8J	677	243	314	2064
	245 / 45 R 18	100 XL	H	8J	677	243	314	2064
40 series	285 / 40 R 18	101	Y	10J	685	290	317	2089

Rolling Circumference $\pm 2\%$

POTENZA RE040 RFT

PSR RFT

For BMW Z8, Lexus SC 430, GS



45 series	245 / 45 R 18	96	W	8J	677	243	314	2064	
40 series	245 / 40 R 18		Z	8 1/2J	653	248	304	1991	
	275 / 40 R 18	99	W	8 1/2J	677	278	314	2064	

Rolling Circumference $\pm 2\%$

POTENZA RE050A EXT

PSR EXT

For Mercedes SLR



40 series	255 / 40 R 18	95	Y	9J	661	260	308	2016	
35 series	285 / 35 R 18	97	Y	10J	657	290	306	2003	

Rolling Circumference $\pm 2\%$

POTENZA RE050 EXT

PSR EXT

For Mercedes A, B, C & S-Class



45 series	215 / 45 R 17	87	V	7J	626	213	291	1909
	225 / 45 R 17	91	W	7 1/2J	634	225	294	1933
	245 / 45 R 18	96	Y	8J	677	243	314	2064
40 series	245 / 40 R 17	91	W	8 1/2J	628	248	292	1915
	265 / 40 R 18	97	Y	9 1/2J	669	271	311	2040

Rolling Circumference $\pm 2\%$

POTENZA RE71G RFT

PSR RFT

45 series	235 / 45 R 17		Z	8J	644	236	298	1964
40 series	255 / 40 R 17		Z	9J	636	260	295	1939

Rolling Circumference $\pm 2\%$

Turanza ER300 RFT

PSR RFT

For BMW 1 & 3 series, VW Passat, Eos, Touran, Golf, Seat Leon



55 Series	195 / 55 R 16	87	H/V	6J	620	201	286	1891	
	205 / 55 R 16	91	H/V/W	6 1/2J	632	214	291	1927	
	205 / 55 R 16	94 XL	V	6 1/2J	632	214	291	1927	
	215 / 55 R 16	97 XL	V	7J	642	226	295	1958	

Rolling Circumference $\pm 2\%$

Turanza ER300-1 RFT

PSR RFT

For BMW 1 & 3 series



55 Series	195 / 55 R 16	87	H	6J	620	201	286	1891	
	205 / 55 R 16	91	H/V/W	6 1/2J	632	214	291	1927	

Rolling Circumference $\pm 2\%$

Turanza ER33 RFT

PSR RFT

For Lexus SC 430



40 series	245 / 40 R 18 245 / 40 R 18	93	Y Z	8 1/2J 8 1/2J	653 653	248 248	304 304	1991 1991

Rolling Circumference ± 2%

Turanza ER42 RFT

PSR RFT

For BMW 7 series



50 series	245 / 50 R 18	100	W	7 1/2J	703	253	324	2144

Rolling Circumference ± 2%



PASSENGER

SUMMER - REPLACEMENT

POTENZA RE050A

State of the art driving precision from Formula One technology. Response and control beyond your dreams with a good level of comfort and low noise. Superb wet grip provides ultimate safety.

Chosen by many leading car manufacturers for high-performance models, including: Alfa Romeo 147 (standard version, GTA & GT Coupe), 159, GT & Brera, AMG C-Class, S-Class, CLS 55 & SL 55, Aston Martin V8 Vantage, DB9 & DB9 Volante, Audi A4, A6, S6 & TT, BMW 1-Series, 3-Series, 5-Series, 6-Series & Z4, Ferrari Enzo, 575-Maranello Superamerica, F430 & Scaglietti 612, Honda S2000, Lexus IS 250/350, Mercedes-Benz A-Class, B-Class, C-Class, E-Class armoured, S-Class armoured, New-S-Class, CLK-Class, SLK-Class, SL55 & SL65, Maserati Quattroporte, Mitsubishi Lancer Evolution 8, Opel Astra & Zafira, Porsche 911, Cayman & Boxster, Seat Altea, Leon-&Toledo, Subaru Impreza & Legacy, Volkswagen Cabrio EOS, Golf 5, Golf GTI, Golf Plus & Passat.



									
55 series	205 / 55 R 16	91	W	6 1/2J	632	214	291	1972	
	225 / 55 R 17	101 XL	Y	7J	680	233	312	2074	
50 series	225 / 50 R 16	92	W	7J	632	233	291	1927	
	205 / 50 R 17	93 XL	Y	6 1/2J	638	214	296	1945	
45 series	195 / 45 R 16	80	V	6 1/2J	582	195	271	1775	
	225 / 45 R 17	91	W/Y	7 1/2J	634	225	294	1933	
	225 / 45 R 17	94 XL	Y	7 1/2J	634	225	294	1933	
	235 / 45 R 17	94	Y	8J	644	236	298	1964	
	245 / 45 R 17	95	Y	8J	652	243	301	1988	
	225 / 45 R 18	91	Y	7 1/2J	659	225	307	2009	
	255 / 45 R 18	99	Y	8 1/2J	687	255	318	2095	
	245 / 45 R 19	98	Y	8J	703	243	327	2144	
40 series	205 / 40 R 17	80	Y	7 1/2J	596	212	279	1817	
	205 / 40 R 17	84 XL	W	7 1/2J	596	212	279	1817	
	215 / 40 R 17	83	Y	7 1/2J	604	208	283	1842	
	215 / 40 R 17	87 XL	Y	7 1/2J	604	208	283	1842	
	235 / 40 R 17	90	Y	8 1/2J	620	241	289	1891	
	255 / 40 R 17	94	Y	9J	636	260	295	1939	
	225 / 40 R 18	88	Y	8J	637	230	298	1942	
	235 / 40 R 18	91	Y	8 1/2J	645	241	301	1967	
	235 / 40 R 18	95 XL	Y	8 1/2J	645	241	301	1967	
	245 / 40 R 18	93	Y	8 1/2J	653	248	304	1991	
	225 / 40 R 19	93 XL	Y	8J	663	230	311	2022	
	275 / 40 R 19	101	Y	9 1/2J	703	278	327	2144	
	245 / 40 R 20	95	Y	8 1/2J	704	248	330	2147	

Rolling Circumference $\pm 2\%$



35 series	245 / 35 R 18	92 XL	Y	8 1/2J	629	248	295	1918	
	255 / 35 R 18	90	Y	9J	635	260	297	1936	
	255 / 35 R 18	94 XL	Y	9J	635	260	297	1936	
	265 / 35 R 18	93	Y	9 1/2J	643	271	301	1961	
	275 / 35 R 18	95	Y	9 1/2J	649	278	303	1979	
	255 / 35 R 20	97 XL	Y	9J	686	260	323	2092	
30 series	275 / 35 R 20	98	Y	9 1/2J	700	278	328	2135	
	285 / 30 R 18	93	Y	10J	629	290	295	1918	
	275 / 30 R 19	96 XL	Y	9 1/2J	649	278	306	1979	
	285 / 30 R 20	99 XL	Y	10J	680	290	321	2074	



Superb harmony of comfort and stability. Smooth drive reduces stress on long journeys of top-end touring cars. Premium wet handling for more safety.

Chosen by many leading car manufacturers for their latest models, including: Alfa Romeo 147, 156 & GT, Audi A4, A6 & TT, BMW 1-Series & 3-Series, Chrysler Sebring, Dodge Avenger, Fiat Bravo, Croma, Punto, Sedici & Stilo, Ford New Focus, Honda Civic, Lancia-Thesis, Mercedes-Benz E, C & S-Class, Opel Astra, Vectra & Zafira, Peugeot 1007, Renault Clio 3, Seat Altea, Leon & Toledo, Skoda Fabia, Octavia, Roomster Superb, Suzuki SX4, Volkswagen Cabrio EOS, Golf 5, Passat, Polo & Touran.



								
65 Series	185 / 65 R 15	88	H	5 1/2J	621	189	284	1894
	195 / 65 R 15	91	H/V	6J	635	201	289	1936
	205 / 65 R 15	94	H/V	6J	647	209	294	1973
	215 / 65 R 15	96	H	6 1/2J	661	221	299	2016
	215 / 65 R 16	98	H	6 1/2J	686	221	312	2092
60 Series	185 / 60 R 14	82	H	5 1/2J	578	189	264	1762
	195 / 60 R 14	86	H	6J	590	201	269	1799
	185 / 60 R 15	88 XL	H	5 1/2J	603	189	277	1839
	195 / 60 R 15	88	H/V	6J	615	201	281	1875
	205 / 60 R 15	91	H/V	6J	627	209	286	1912
	225 / 60 R 15	96	V/W	6 1/2J	651	228	295	1985
	205 / 60 R 16	92	V	6J	652	209	298	1988
	215 / 65 R 16	99 XL	H	6 1/2J	664	221	303	2025
	225 / 60 R 16	98	Y	6 1/2J	676	228	308	2061
55 Series	195 / 55 R 15	85	Y	6J	595	201	273	1814
	205 / 55 R 16	91	H/V/W	6 1/2J	632	214	291	1927
	215 / 55 R 16	93	H/V/W	7J	642	226	295	1958
	215 / 55 R 16	97 XL	H/W	7J	642	226	295	1958
	225 / 55 R 16	95	V/ W/ Y	7J	654	233	299	1994
	215 / 55 R 17	94	W	7J	668	226	308	2037
	225 / 55 R 17	97	Y	7J	680	233	312	2074
	225 / 55 R 17	101 XL	W	7J	680	233	312	2074
50 Series	195 / 50 R 15	82	H/V	6J	577	201	266	1759
	205 / 50 R 16	87	H/W	6 1/2J	612	214	283	1866
	205 / 50 R 17	89	W	6 1/2J	638	214	296	1945
	205 / 50 R 17	93 XL	W	6 1/2J	638	214	296	1945
	225 / 50 R 17	94	W	7J	658	233	304	2006
45 Series	215 / 45 R 17	87	W	7J	626	213	291	1909
	225 / 45 R 17	91	W	7 1/2J	634	225	294	1933

Rolling Circumference $\pm 2\%$



A good balance between comfort & stability, quietness & aquaplaning and performance & mileage.

Chosen by many leading car manufacturers, including: Kia - Grand Carnival, Fiat Punto, Mercedes-Benz B class, Opel Astra, Renault Clio & Modus, Skoda Roomster, Toyota Yaris.



70 Series	155 / 70 R 13	75	T	4 1/2B	548	157	250	1671
	165 / 70 R 13	79	T	5J	562	170	255	1714
	175 / 70 R 13	82	T	5J	576	177	260	1756
	165 / 70 R 14	81	T	5J	588	170	268	1793
	175 / 70 R 14	84	T	5J	602	177	273	1836
65 Series	155 / 65 R 13	73	T	4 1/2J	532	157	243	1622
	165 / 65 R 13	77	T	5J	544	170	248	1659
	175 / 65 R 13	80	T	5J	558	177	253	1701
	155 / 65 R 14	75	T	4 1/2J	558	157	256	1701
	165 / 65 R 14	79	T	5J	570	170	261	1738
	175 / 65 R 14	82	T/H	5J	584	177	266	1781
	185 / 65 R 14	86	T/H	5 1/2J	596	189	271	1817
	185 / 65 R 15	88	T	5 1/2J	621	189	284	1894
60 Series	185 / 60 R 14	82	T	5 1/2J	578	189	264	1762

Rolling Circumference $\pm 2\%$



B330

PSR Replacement

Predecessor of B250. For small cars, focus on lower sizes (70/80 Series and 13/14 inch).



80 Series	175 / 80 R 14	88	T	5J	636	177	287	1939
70 Series	195 / 70 R 14	91	T	6J	630	201	284	1921
	195 / 70 R 15	97 RFD	T	6J	655	201	297	1997

Rolling Circumference $\pm 2\%$

B330 EVO

PSR Replacement

The B330 Evo general-use tyre upgrades the successful B330 with a newer carcass construction and tread compound. Comfort and handling is optimised with an improved sidewall contour and tuned-up bead construction, while the new tread compound improves wet grip and extends tyre wear significantly.



80 Series	145 / 80 R 13	75	T	4J	562	145	255	1714
	155 / 80 R 13	79	T	4 1/2B	578	157	261	1762
	165 / 80 R 13	83	T	4 1/2B	594	165	267	1811
70 Series	145 / 70 R 13	71	T	4 1/2B	534	150	244	1628
	185 / 70 R 13	86	T	5 1/2B	590	189	266	1799
	185 / 70 R 14	88	T	5 1/2J	616	189	279	1878
65 Series	195 / 65 R 14	89	T	6J	610	201	277	1860
	215 / 65 R 15	96	T	6 1/2J	661	221	299	2016

Rolling Circumference $\pm 2\%$



PASSENGER
WINTER - WARRANTY

BLIZZAK LM22

PXR Warranty

For Honda NSX



40 Series	215 / 40 R 17	83	v	7 1/2J	604	208	283	1842

Rolling Circumference $\pm 2\%$

BLIZZAK LM25

PXR Warranty

For Mercedes C-Class, VW Golf 5



65 Series	195 / 65 R 15	91	H	6J	635	201	289	1936
60 Series	195 / 60 R 16	89	H	6J	640	201	294	1952

Rolling Circumference $\pm 2\%$





PASSENGER
WINTER - RFT + EXT

BLIZZAK RFT

PXR RFT

For BMW 1, 3 and 5 series, Z4 and Mini



55 Series	195 / 50 R 16	87	Q	6J	620	201	286	1891
	205 / 50 R 16	91	Q	6 1/2J	632	214	291	1972
50 Series	225 / 50 R 17	94	Q	7J	658	233	304	2006

Rolling Circumference $\pm$ 2%

BLIZZAK LM22 RFT

PXR RFT

For BMW Z4, 5 series



55 Series	205 / 55 R 16	91	H	6 1/2J	632	214	291	1927
50 Series	225 / 50 R 17	94	H	7J	658	233	304	2006
45 Series	225 / 45 R 17	91	V	7 1/2J	634	225	294	1933

Rolling Circumference $\pm$ 2%

For BMW 1, 3, 5 and 6 series, Z4, Mini, Nissan GTR




55 Series	195 / 55 R 16	87	H	6J	620	201	286	1891
	205 / 55 R 16	91	H	6 1/2J	632	214	291	1927
	205 / 55 R 16	94 XL	H	6 1/2J	632	214	291	1927
50 Series	225 / 50 R 16	92	H	7J	632	233	291	1927
	205 / 50 R 17	89	V	6 1/2J	638	214	296	1945
	225 / 50 R 17	94	H	7J	658	233	304	2006
	245 / 50 R 17	99	H	7 1/2J	678	253	311	2067
	245 / 50 R 18	100	H	7 1/2J	703	253	324	2144
45 Series	205 / 45 R 17	84	V	7J	616	206	287	1878
	225 / 45 R 17	91	H	7 1/2J	634	225	294	1933
	225 / 45 R 17	94 XL	V	7 1/2J	634	225	294	1933
	245 / 45 R 17	99 XL	V	8J	652	243	301	1988
	245 / 45 R 18	96	V	8J	677	243	314	2064
40 Series	255 / 40 R 20	97	V	9J	712	260	333	2171
35 Series	285 / 35 R 20	100	V	10J	708	290	332	2159

Rolling Circumference $\pm 2\%$

BLIZZAK LM25 EXT

PXR EXT

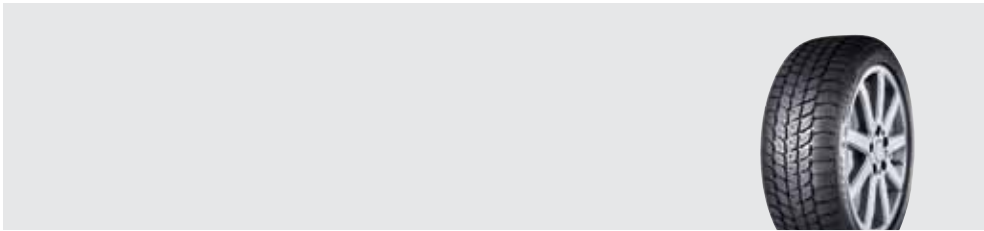


40 Series	255 / 40 R 18	95	V	9J	661	260	308	2016
-----------	---------------	----	---	----	-----	-----	-----	------

Rolling Circumference ± 2%

BLIZZAK MZ03 RFT

PXR RFT

For Lexus SC 430

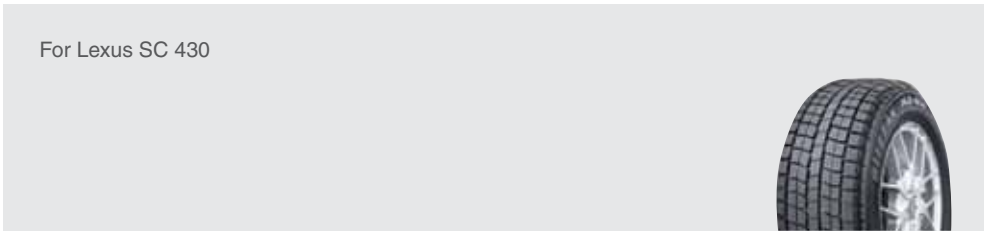

40 Series	245 / 40 R 18	93	Q	8 1/2J	653	248	304	1991
-----------	---------------	----	---	--------	-----	-----	-----	------

Rolling Circumference ± 2%



PASSENGER
WINTER - REPLACEMENT

Designed and manufactured with Bridgestone's advanced technology, and enhanced with tread pattern design and materials, the Blizzak LM-18 gives motorists unbeatable performance in both winter and wet/dry conditions.



80 Series	145 / 80 R 13	75	Q	4J	562	145	255	1714
	155 / 80 R 13	79	Q	4 1/2B	578	157	261	1762
	145 / 80 R 14	76	Q	4J	588	145	268	1793
	165 / 80 R 14	85	Q	4 1/5J	620	165	280	1891
	175 / 80 R 14	88	T	5J	636	177	287	1939
70 Series	195 / 70 R 14	95 RFD	T	6J	630	201	284	1921
	195 / 70 R 15	97 RFD	S	6J	655	201	297	1997
65 Series	145 / 65 R 15	72	T	4 1/2J	569	150	263	1735
	175 / 65 R 15	84	T	5J	609	177	279	1857
60 Series	235 / 60 R 16	100	H	7J	688	240	312	2098
	225 / 60 R 17	99	H	6 1/2J	702	228	321	2141
55 Series	175 / 55 R 15	77	T	5 1/2J	573	182	265	1747

Rolling Circumference $\pm$ 2%

Balanced harmony of a comfortable, quiet ride in all conditions. Extra safety in wet and slush conditions through fast evacuation of water. Precise control on snow and ice. Tyre designed with snow simulation technology that measures the steering force distribution to the nearest millimetre.



								
70 Series	155 / 70 R 13	75	T	4 1/2B	548	157	250	1671
	165 / 70 R 13	79	T	5J	562	170	255	1714
	175 / 70 R 13	82	T	5J	576	177	260	1756
	165 / 70 R 14	81	T	5J	588	170	268	1793
	175 / 70 R 14	84	T	5J	602	177	273	1836
	185 / 70 R 14	88	T	5 1/2J	616	189	279	1878
	195 / 70 R 14	91	T	6J	630	201	284	1921
65 Series	175 / 65 R 13	80	T	5J	558	177	253	1701
	155 / 65 R 14	75	T	4 1/2J	558	157	256	1701
	165 / 65 R 14	79	T	5J	570	170	261	1738
	175 / 65 R 14	82	T	5J	584	177	266	1781
	175 / 65 R 14	86 XL	T	5J	584	177	266	1781
	185 / 65 R 14	86	T	5 1/2J	596	189	271	1817
	165 / 65 R 15	81	T	5J	595	170	273	1814
60 Series	185 / 65 R 15	88	T	5 1/2J	621	189	284	1894
	185 / 65 R 15	92 XL	T	5 1/2J	621	189	284	1894
	165 / 60 R 14	75	T	5J	554	170	255	1689
	185 / 60 R 14	82	T	5 1/2J	578	189	264	1762
	155 / 60 R 15	74	T	4 1/2J	567	157	263	1729
	185 / 60 R 15	84	T	5 1/2J	603	189	277	1839
	185 / 60 R 15	88 XL	T	5 1/2J	603	189	277	1839
55 Series	195 / 60 R 15	88	T	6J	615	201	281	1875
	185 / 55 R 14	80	T	6J	560	194	257	1708
	175 / 55 R 15	77	T	5 1/2J	573	182	265	1747

Rolling Circumference ± 2%



A high performance, Winter tyre, the Blizzak LM-22 employs Bridgestone's latest technology to provide excellent grip and handling whether on snow, wet or dry surfaces particularly well suited to Europe's changeable winter weather.



55 Series	235 / 55 R 17	99	V	7 1/2J	690	245	316	2104	
50 Series	235 / 50 R 17	96	V	7 1/2J	668	245	308	2037	
	235 / 50 R 18	101 XL	V	7 1/2J	693	245	320	2113	
45 Series	215 / 45 R 18	93 XL	V	7J	651	213	304	1985	
	255 / 45 R 18	103 XL	V	8 1/2J	687	255	318	2095	
40 SerieS	245 / 40 R 17	91	H	8 1/2J	628	248	292	1915	
	255 / 40 R 19	100 XL	V	9J	687	260	321	2095	

Rolling Circumference $\pm 2\%$

Exceptional traction and handling on snow and wet for today's powerful cars. Precise control in winter conditions with reduced risk of hydroplaning. Extremely quiet and highly durable.

Tyre designed with snow simulation technology that measures the steering force distribution to the nearest millimetre.



65 Series	195 / 65 R 15	91	T/H	6J	635	201	289	1936
	195 / 65 R 15	95 XL	T	6J	635	201	289	1936
	205 / 65 R 15	94	T/H	6J	647	209	294	1973
	215 / 65 R 15	96	H	6 1/2J	661	221	299	2016
	195 / 65 R 16	92	H	6J	660	201	302	2013
60 Series	205 / 60 R 15	91	T/H	6J	627	209	286	1912
	225 / 60 R 15	96	H	6 1/2J	651	228	295	1985
	205 / 60 R 16	92	H	6J	652	209	298	1988
	205 / 60 R 16	96 XL	H	6J	652	209	298	1988
	215 / 60 R 16	99 XL	H	6 1/2J	664	221	303	2025
	225 / 60 R 16	98	H	6 1/2J	676	228	308	2061
55 Series	185 / 55 R 15	82	T/H	6J	585	194	270	1784
	195 / 55 R 15	85	H	6J	595	201	273	1814
	185 / 55 R 16	87 XL	T	6J	610	194	282	1860
	195 / 55 R 16	87	T/H	6J	620	201	286	1891
	205 / 55 R 16	91	T/H	6 1/2J	632	214	291	1927
	205 / 55 R 16	94 XL	H/V	6 1/2J	632	214	291	1927
	215 / 55 R 16	93	H	7J	642	226	295	1958
	215 / 55 R 16	97 XL	H/V	7J	642	226	295	1958
	225 / 55 R 16	95	H	7J	654	233	299	1994
	225 / 55 R 16	99 XL	H/V	7J	654	233	299	1994
	205 / 55 R 17	91	V	6 1/2J	658	214	304	2006
	215 / 55 R 17	98 XL	V	7J	668	226	308	2037
	225 / 55R 17	101 XL	V	7J	680	233	312	2074
50 Series	195 / 50 R 15	82	T/H	6J	577	201	266	1759
	195 / 50 R 16	84	H	6J	602	201	279	1836
	205 / 50 R 16	87	H	6 1/2J	612	214	283	1866
	205 / 50 R 17	89	H	6 1/2J	638	214	296	1945
	205 / 50 R 17	93 XL	V	6 1/2J	638	214	296	1945
	215 / 50 R 17	91	H	7J	648	226	300	1976
	225 / 50 R 17	94	H	7J	658	233	304	2006
	225 / 50 R 17	98 XL	V	7J	658	233	304	2006
	235 / 50 R 18	97	V	7 1/2J	693	245	320	2113

Rolling Circumference $\pm$ 2%



45 Series	205 / 45 R 16	83	H	7J	590	206	274	1799
	205 / 45 R 17	88 XL	V	7J	616	206	287	1878
	215 / 45 R 17	91 XL	H	7J	626	213	291	1909
	215 / 45 R 17	87	H	7J	626	213	291	1909
	215 / 45 R 17	91 XL	V	7J	626	213	291	1909
	225 / 45 R 17	91	H	7 1/2J	634	225	294	1933
	225 / 45 R 17	94 XL	V	7 1/2J	634	225	294	1933
	235 / 45 R 17	94	H	8J	644	236	298	1964
	235 / 45 R 17	97 XL	V	8J	644	236	298	1964
	245 / 45 R 17	99 XL	V	8J	652	243	301	1988
	225 / 45 R 18	95 XL	V	7 1/2J	659	225	307	2009
	235 / 45 R 18	98 XL	V	8J	669	236	311	2040
	245 / 45 R 18	100 XL	V	8J	677	243	314	2064
	245 / 45 R 19	98	V	8J	703	243	327	2144
40 Series	205 / 40 R 17	94 XL	H	7 1/2J	596	212	279	1817
	255 / 40 R 17	98 XL	V	9J	636	260	295	1939
	225 / 40 R 18	92 XL	V	8J	637	230	298	1942
	235 / 40 R 18	95 XL	V	8 1/2J	645	241	301	1967
	245 / 40 R 18	97 XL	V	8 1/2J	653	248	304	1991
	255 / 40 R 18	99 XL	V	9J	661	260	308	2016
	225 / 40 R 19	93 XL	V	8J	663	230	311	2022
35 Series	255 / 35 R 18	94 XL	V	9J	635	260	297	1936
	265 / 35 R 18	97 XL	V	9 1/2J	643	271	301	1961
	255 / 35 R 19	96 XL	V	9J	661	260	310	2016

Rolling Circumference $\pm$ 2%



55 Series
50 Series

165 / 55 R 15
165 / 50 R 15

75
73

Q
Q

5J
5J

563
547

170
170

261
255

1717
1668

Rolling Circumference $\pm 2\%$

Taking studless performance in extreme winter conditions to new levels.

Excellent handling in a wide range of winter conditions, even at higher speeds. Highly durable construction reduces road noise and enhances comfort plus improved driving performance in both wet and dry conditions.



70 Series	175 / 70 R 13	82	R	5J	576	177	260	1756
	185 / 70 R 14	88	R	5 1/2J	616	189	279	1878
65 Series	175 / 65 R 14	82	R	5J	584	177	266	1781
	185 / 65 R 14	86	R	5 1/2J	596	189	271	1817
	185 / 65 R 15	88	R	5 1/2J	621	189	284	1894
	195 / 65 R 15	91	R	6J	635	201	289	1936
	205 / 65 R 15	94	R	6J	647	209	294	1973
60 Series	185 / 60 R 14	82	R	5 1/2J	578	189	264	1762
	185 / 60 R 15	84	R	5 1/2J	603	189	277	1839
	195 / 60 R 15	88	R	6J	615	201	281	1875
	205 / 60 R 16	96 XL	R	6J	652	209	298	1988
	215 / 60 R 16	96 XL	R	6 1/2J	664	221	303	2025
55 Series	185 / 55 R 15	82	R	6J	585	194	270	1784
	195 / 55 R 15	89 XL	R	6J	595	201	273	1814
	195 / 55 R 16	87	R	6J	620	201	286	1891
	205 / 55 R 16	94 XL	R	6 1/2J	632	214	291	1927
	215 / 55 R 16	97 XL	R	7J	642	226	295	1958
	225 / 55 R 16	99 XL	R	7J	654	233	299	1994
50 Series	225 / 55 R 17	101 XL	R	7J	680	233	312	2074
	225 / 50 R 17	98 XL	R	7J	658	233	304	2006
45 Series	215 / 45 R 17	91 XL	R	7J	626	213	291	1909
	225 / 45 R 17	94 XL	R	7 1/2J	634	225	294	1933

Rolling Circumference $\pm$ 2%



70 series	175 / 70 R 14	84	T	5J	602	177	273	1836
	185 / 70 R 14	92 XL	T	5 1/2J	616	189	279	1878
65 series	175 / 65 R 14	86 XL	T	5J	584	177	266	1781
	185 / 65 R 14	90 XL	T	5 1/2J	596	189	271	1817
	185 / 65 R 15	92 XL	T	5 1/2J	621	189	284	1894
	195 / 65 R 15	95 XL	T	6J	635	201	289	1936
	205 / 65 R 15	99 XL	T	6J	647	209	294	1973
	215 / 65 R 15	100 XL	T	6 1/2J	661	221	299	2016
	195 / 65 R 16	96 XL	T	6J	660	201	302	2013
	215 / 65 R 16	102 XL	T	6 1/2J	686	221	312	2092
60 series	185 / 60 R 15	88 XL	T	5 1/2J	603	189	277	1839
	195 / 60 R 15	92 XL	T	6J	615	201	281	1875
	195 / 60 R 15	93 XL	T	6J	640	201	294	1952
	205 / 60 R 16	96 XL	T	6J	652	209	298	1988
	215 / 60 R 16	99 XL	T	6 1/2J	664	221	303	2025
	225 / 60 R 16	102 XL	T	6 1/2J	676	228	308	2061
55 series	185 / 55 R 15	86 XL	T	6J	585	194	270	1784
	195 / 55 R 15	89 XL	T	6J	595	201	273	1814
	185 / 55 R 16	87 XL	T	6J	610	194	282	1860
	205 / 55 R 16	94 XL	T	6 1/2J	632	214	291	1927
	215 / 55 R 16	97 XL	T	7J	642	226	295	1958
	225 / 55 R 16	99 XL	T	7J	654	233	299	1994
	215 / 55 R 17	98 XL	T	7J	668	226	308	2037
	255 / 55 R 17	101 XL	T	7J	680	233	312	2074
50 series	205 / 50 R 17	93 XL	T	6 1/2J	638	214	296	1945
45 series	225 / 45 R 17	94 XL	T	7 1/2J	634	225	294	1933
	235 / 45 R 17	97 XL	T	8J	644	236	298	1964
40 series	225 / 40 R 18	92 XL	T	8J	637	230	298	1942

Rolling Circumference $\pm 2\%$

Noranza provides exceptional ice grip, without sacrificing comfort, handling and quietness. The light weight aluminium studs with high retention and low noise are friendly to both driver and environment.



80 series	155 / 80 R 13	79	Q	4 1/2B	578	157	261	1762
70 series	155 / 70 R 13	75	T	4 1/2B	548	157	250	1671
	165 / 70 R 13	79	T	5J	562	170	255	1714
	175 / 70 R 13	82	T	5J	576	177	260	1756
	165 / 70 R 14	81	T	5J	588	170	268	1793

Rolling Circumference $\pm 2\%$



4x4
SPECIFIC INFO

Bridgestone Recommended Profile

4x4

Season	summer				winter	
Use and terrain condition	100% road	80% road 20% off road (mild off road use)	60% road 40% off road	20% road 80% off road (heavy duty off-road use)	temperatures under 7°, frequent rain, snow and occasional ice	temperatures under 7°, snow and frequent ice
Customer expectations						
- Driving precision - High speed steering accuracy - Safety on wet roads - Comfort - Aggressive design	 Dueler H/P sport Dueler H/P 680					
- Safety on wet roads - High speed steering accuracy - Silent, driving comfort - Mileage	 Dueler H/L 683					
- Smooth comfortable drive - Silent - Selected by many car manufacturers		 Dueler H/T 689				
- Modern 4X4 style - Mileage - All round performer			 Dueler A/T 694			
- Tough & durable - Exceptional traction and flotation under extreme use						
- Safety and control in winter conditions - Excellent road holding capabilities				 Blizzak LM25 4x4		
- Grip on ice, alternative solution to studded tyres						 Blizzak DMZ3

Size Conversion Chart

4x4

Original Size			Option Sizes											
85-80-Series			75-Series			70-Series			65-60-Series			Other sizes		
Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.
195/80 R15	694	94	P205/75 R15	692	97	225/70 R15	699	100	215/65 R16	691	98	30x950 R15 753 105		
215/80 R15	723	101				235/70 R15	715	103	P275/60 R15	708	107			
225/80 R15	741	105				255/70 R15	741	112	P265/60 R17	752	108			
						245/70 R16	753	107						
175/80 R16	692	91	P205/75 R15	692	97	225/70 R15	699	100	215/65 R16	691	98	30x950 R15 753 105		
205/80 R16	740	99	235/75 R15	735	104	255/70 R15	741	112	P265/60 R17	752	108			
			225/75 R16	748	103	245/70 R16	753	107						
215/80 R16	748	107				255/70 R15	741	112	P265/60 R17	752	108	31x1050 R15 780 109 31x1150 R15 780 110		
						265/70 R15	753	110						
235/80 R16	782	109	265/75 R15	780	112	P255/70 R16	767	109	P265/60 R18	777	109			
215/85 R16	780	110	265/75 R15	780	112	265/70 R16	777	112	P285/60 R18	801	114	31x1150 R15	780	110
235/85 R16	817	108	265/75 R16	808	112							750 R16	810	114

Original Size			Option Sizes ▶								
75-Series			70-Series			65-60-Series			Other sizes		
Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.
P205/75 R15	692	97	225/70 R15	699	100	215/65 R16	691	98	30x950 R15 753 105		
215/75 R15	710	100	225/70 R15	699	100	P275/60 R15	708	107			
			235/70 R15	715	103						
235/75 R15	735	104	255/70 R15	741	112				31x1050 R15 780 109 31x1150 R15 780 110		
225/75 R16	748	103	255/70 R15	741	112	P265/60 R17	752	108			
			245/70 R16	753	107						
245/75 R16	779	108	P255/70 R16	767	109	P265/60 R18	777	109			
			265/70 R16	777	112						
265/75 R15	780	112	265/70 R16	777	112						
265/75 R16	808	112				P285/60 R18	801	114	750 R16	810	114
285/75 R16	838	116									

Original Size			Option Sizes								
70-Series			65-60-Series			Other sizes					
Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.
P205/70 R15	668	95				750 R16 810 114					
225/70 R15	699	100	235/60 R16	688	100						
			255/50 R17	690	100						
235/70 R15	715	103	P275/60 R15	708	107						
255/70 R15	741	112									
265/70 R16	753	110									
205/70 R16	700	97	215/65 R16	691	98						
			P275/60 R15	708	107						
215/70 R16	707	99									
245/70 R16	753	107	P275/60 R15	708	107						
			P265/60 R17	752	108						
P255/70 R16	767	109	P265/60 R17	752	108						
			P275/60 R17	764	110						
275/70 R16	793	114	P265/60 R18	777	109						
			P285/60 R18	801	114						

NOTES :
1.2.



4x4
SUMMER - WARRANTY

DUELER H/L 400

4x4 SUMMER Warranty

For Nissan Pathfinder




65 series	255 / 65 R 17	110	T	7 1/2J	764	260	345	2330

Rolling Circumference ± 2%

DUELER H/L 683

4x4 SUMMER Warranty

The Dueler H/L 683 is specially designed for highway use, pure comfort oriented drivers of luxury 4x4 vehicles. Its “state of the art” pattern and carcass provide excellent comfort and a quiet ride. Available with black or white outlined “aggressive” sidewall lettering. For Cadillac Escalade.

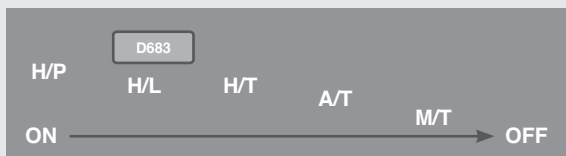


70 series	255 / 70 R 16	109	H	7 1/2J	764	260	342	2330
65 series	255 / 65 R 18	112	H	8J	801	271	362	2443

Rolling Circumference ± 2%

DUELER H/T 684

4x4 SUMMER Warranty

For Land Rover Freelander, Fiat Panda 4x4, Honda CRV, Subaru Forester, ...

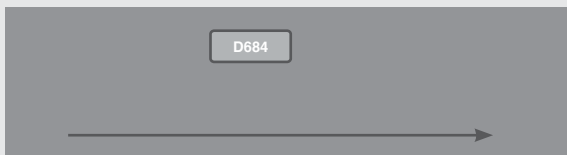

M+S

82 series	195 / 82 R 15	94	R	5 1/2J	693	196	312	2113	
80 series	195 / 80 R 15	96	S	5 1/2J	693	196	312	2113	
70 series	205 / 70 R 15	95	S/H	6J	669	209	302	2040	
	205 / 70 R 15	96	T	6J	669	209	302	2040	
65 series	185 / 65 R 14	86	T	5 1/2J	596	189	271	1817	
	205 / 65 R 16	95	T	6J	672	209	306	2049	
	215 / 65 R 16	98	T	6 1/2J	686	221	312	2092	
	235 / 65 R 17	104	H	7J	738	240	335	2250	
60 series	275 / 60 R 18	113	H	8J	787	279	357	2400	

Rolling Circumference $\pm 2\%$

DUELER H/T 684 II

4x4 SUMMER Warranty

For Cadillac Escalade, Toyota Land Cruiser



M+S

65 series	265 / 65 R 18	112	S	8J	801	271	362	2443	
60 series	285 / 60 R 18	116	V	8 1/2J	799	292	361	2436	

Rolling Circumference $\pm 2\%$

For Nissan X-Trail, Subaru Forester, Toyota Rav4, ...



70 Series	205 / 70 R 15	95	S	6J	669	209	302	2040
	225 / 70 R 15	100	S	6 1/2J	697	228	313	2125
	215 / 70 R 16	99	H	6 1/2J	708	221	320	2159
	225 / 70 R 16	102	S/T	6 1/2J	722	228	326	2202
	235 / 70 R 16	105	T	7J	736	240	331	2244
65 Series	215 / 65 R 16	98	H/V	6 1/2J	686	221	312	2092
	225 / 65 R 17	101	S/H	6 1/2J	724	228	329	2208
50 Series	235 / 50 R 16	100	H	7J	688	240	312	2098
55 Series	235 / 55 R 18	99	H	7 1/2J	715	245	329	2180

Rolling Circumference $\pm$ 2%

DUELER H/T 688

For Suzuki Vitara



65 series	215 / 65 R 16	98	S	6 1/2J	686	221	312	2092

Popular Bridgestone 4x4 tyre, the H/T689 also enjoys a wide range of Original Equipment approvals.

The success of the H/T689 is due to its refined and well-balanced, highway oriented performance. For Mitsubishi Pajero, Nissan X-Trail & Pathfinder, Mitsubishi L200, ...



M+S

82 Series	195 / 82 R 15	94	S	5 1/2J	693	196	312	2113
	205 / 82 R 16C	110	Q/R	6J	736	208	343	2230
80 Series	205 / 80 R 16	104 RFD	S	5 1/2J	734	203	330	2238
	215 / 80 R 16	107 RFD	S	6J	750	216	337	2287
	235 / 80 R 16	109	S	6 1/2J	782	235	349	2385
75 Series	235 / 75 R 15	105	S/T	6 1/2J	733	235	327	2235
70 Series	255 / 70 R 15	108	S	7 1/2J	739	260	330	2253
	255 / 70 R 15	112	R	7 1/2J	739	260	330	2253
	265 / 70 R 15	110	S/H	8J	753	272	335	2296
	265 / 70 R 15	112	S	8J	753	272	335	2296
	235 / 70 R 16	105	S/T/H	7J	736	240	331	2244
	245 / 70 R 16	107	S	7J	750	248	337	2287
	245 / 70 R 16	111 RFD	S	7J	750	248	337	2287
	255 / 70 R 16	111	T	7 1/2J	764	260	342	2330
	265 / 70 R 16	112	S/H	8J	778	272	348	2372
	265 / 70 R 16	115	R	8J	778	272	348	2372
65 Series	215 / 65 R 16	98	S/H	6 1/2J	686	221	312	2092
	255 / 65 R 16	109	T	7 1/2J	738	260	332	2250
	245 / 65 R 17	107	T	7J	750	248	340	2287
Misc.	10.5 R 15LT	109	R	8.5	775	268	344	2363

Rolling Circumference $\pm$ 2%

DUELER A/T 693

4x4 SUMMER Warranty

A/T 693 offers true all-terrain versatility. UNI-T technology brings improved wet and dry handling, wear resistance. Advanced tread pattern design for optimum traction in off-road conditions. For Isuzu Rodeo & D-Max.



M+S


75 series	225 / 75 R 15C	110	S	6 1/2J	719	223	334	2178
70 series	245 / 70 R 16	111 RFD	S	7J	750	248	337	2287
65 series	255 / 65 R 16	109	S	7 1/2J	738	260	332	2250

Rolling Circumference $\pm 2\%$

DUELER A/T 693 II

4x4 SUMMER Warranty

A/T 693 offers true all-terrain versatility. UNI-T technology brings improved wet and dry handling, wear resistance. Advanced tread pattern design for optimum traction in off-road conditions. For Fiat Panda 4x4.

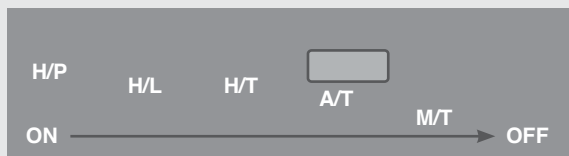

M+S

70 series	165 / 70 R 14	81	T	5J	588	170	268	1793

Rolling Circumference $\pm 2\%$


For Jeep Wrangler, Nissan Patrol & Terano 2 & Navara, Mitsubishi Pajero & L200, ...



82 series	205 / 82 R 16C	110/108	R/S	6J	736	208	343	2230
75 series	245 / 75 R 16	111	S	7J	774	248	346	2360
70 Series	255 / 70 R 15C	112/110	S	7 1/2J	739	260	342	2239
	235 / 70 R 16	106	T/H	7J	736	240	331	2244
	245 / 70 R 16	111 RFD	S	7J	750	248	337	2287
	255 / 70 R 16	111	S	7 1/2J	764	260	342	2330
	265 / 70 R 16	112	S	8J	778	272	348	2372
	225 / 70 R 17	108 RFD	S	6 1/2J	722	228	326	2202
	255 / 70 R 18	113	S	7 1/2J	815	260	368	2485
65 Series	245 / 65 R 17	111 RFD	S	7J	750	248	340	2287
	265 / 65 R 17	110	S	8J	776	272	350	2366
	265 / 65 R 17	112	S/H	8J	776	272	350	2366
	275 / 65 R 17	114	H	8J	790	269	355	2409
	275 / 65 R 17	115	T	8J	790	269	355	2409
60 series	255 / 60 R 17	106	T	7 1/2J	738	260	335	2250
	255 / 60 R 18	108	H	7 1/2J	763	260	347	2327
	265 / 60 R 18	110	H	8J	775	272	352	2363

Rolling Circumference $\pm 2\%$

For Cadillac Escalade

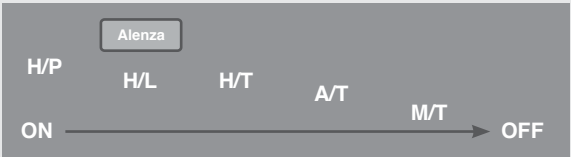

M+S



45 series

285 / 45 R 22

110

H

9 1/2J

815

285


379

2485

Rolling Circumference $\pm 2\%$

Driving precision for sporty SUVs with industry leading wet performance and comfort. An aggressive and rugged design with asymmetric tread pattern on larger rim sizes.

Chosen by many leading car manufacturers for high-performance models, including: Audi Q7, BMW X5, Mitsubishi Outlander, Nissan Qashqai, Porsche Cayenne, Peugeot 4007

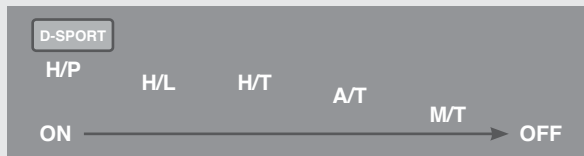

65 Series	215 / 65 R 16	98	H	6 1/2J	686	221	312	2092
	235 / 65 R 17	108 XL	V	7J	738	240	335	2250
60 Series	215 / 60 R 17	96	H	6 1/2J	690	221	316	2104
	235 / 60 R 18	103	V	7J	739	240	338	2253
55 Series	225 / 55 R 18	98	V	7J	705	233	325	2150
	255 / 55 R 18	109 XL	Y	8J	737	265	337	2247
50 Series	265 / 50 R 19	110 XL	Y	8 1/2J	749	277	345	2284
45 Series	275 / 45 R 19	108 XL	Y	9J	731	273	338	2229
	275 / 45 R 20	110 XL	Y	9J	756	273	350	2305
40 Series	275 / 40 R 20	106 XL	Y	9 1/2J	728	278	339	2220



TURANZA EL42

4x4 SUMMER Warranty

For BMW X3



60 Series	215 / 60 R 17	96	H	6 1/2J	690	221	316	2104
55 Series	235 / 55 R 17	99	H	7 1/2J	690	245	316	2104
	255 / 55 R 18	105	V	8J	737	265	337	2247
50 Series	235 / 50 R 18	97	H	7 1/2J	693	245	320	2113

Rolling Circumference $\pm 2\%$

TURANZA ER30

4x4 SUMMER Warranty



65 series	235 / 65 R 17	108 XL	V	7J	738	240	335	2250
60 series	235 / 60 R 16	100	H	7J	688	240	312	2098
55 series	255 / 55 R 18	109 XL	Y	8J	737	265	337	2247
50 series	255 / 50 R 19	103	V/W	8J	739	265	341	2253
45 series	285 / 45 R 19	107	V/W	9 1/2J	739	285	341	2253

Rolling Circumference $\pm 2\%$

RD610 STEEL DESERT DUELER

4x4 SUMMER Warranty

For Nissan Patrol



Misc.	10 R 15	109	N	8J	918	275	399	2799

Rolling Circumference ± 2%

M+S = tyre specifically designed for improved performance on mud and/or snow

BRIDGESTONE



B **PASSION**
for EXCELLENCE

DUELER H/L 400 RFT

4x4 SUMMER RFT

For BMW X5



55 series	255 / 55 R 18	109 XL	H	8J	737	265	337	2247
50 series	255 / 50 R 19	107 XL	H	8J	739	265	341	2253

Rolling Circumference $\pm$ 2%

DUELER H/P SPORT RFT

4x4 SUMMER RFT

Driving precision for sporty SUVs with industry leading wet performance and comfort. An aggressive and rugged design with asymmetric tread pattern on larger rim sizes.

Chosen by many leading car manufacturers for high-performance models, including: Audi Q7, BMW X5, Mitsubishi Outlander, Nissan Qashqai, Porsche Cayenne, Volkswagen Touareg



50 series	255 / 50 R 19	107 XL	V/W	8J	739	265	341	2253
45 series	285 / 45 R 19	111 XL	V/W	9 1/2J	739	285	341	2253
40 series	275 / 40 R 20	106 XL	W	9 1/2J	728	278	339	2220
35 series	315 / 35 R 20	110 XL	W	11J	728	320	339	2220

Rolling Circumference $\pm$ 2%

For Mercedes M- & R-Class



50 series	255 / 50 R 19	103	W	8J	739	265	341	2253


Rolling Circumference $\pm 2\%$



4x4
SUMMER - REPLACEMENT

The M/T 673's main strength is exceptional traction and flotation in all off-road conditions - mud, dirt, etc...

At the same time, M/T673 brings improvements in on-road performance such as wet grip, dry handling and ride comfort.



M+S

85 Series	235 / 85 R 16	120	Q	6 1/2J	782	235	349	2385
75 Series	215 / 75 R 15	100	S	6J	703	216	316	2144
	235 / 75 R 15	104	S	6 1/2J	733	235	327	2235
	225 / 75 R 16	103	S	6J	744	223	334	2269
	265 / 75 R 16	112	S	7 1/2J	804	267	358	2452
Misc.	10.5 R 15LT	109	S	8.5	775	268	344	2363
	11.5 R 15LT	113	Q	9	801	290	354	2443
	12.5 R 15LT	108	Q	10	826	318	364	2519

Rolling Circumference $\pm 2\%$

High performance 4x4 tyre for highway use.
Superb Wet and Dry capability.
Sports oriented handling.
Quiet and comfortable ride.




M+S

70 Series									
	265 / 70 R 15	110	H	8J	753	272	335	2296	
	245 / 70 R 16	107	H	7J	750	248	337	2287	
	265 / 70 R 16	112	H	8J	778	272	348	2372	
	275 / 70 R 16	114	H	8J	792	279	353	2415	

Rolling Circumference $\pm 2\%$

The Dueler H/L 683 is specially designed for highway use, pure comfort oriented drivers of luxury 4x4 vehicles. Its "state of the art" pattern and carcass provide excellent comfort and a quiet ride. Available with black or white outlined "aggressive" sidewall lettering.

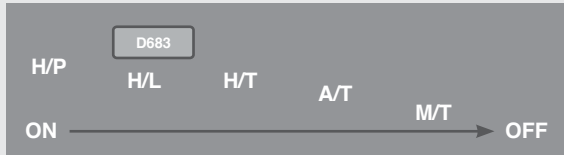

80 Series	215 / 80 R 15	102	T	6J	725	216	324	2211
75 Series	225 / 75 R 16	103	T	6J	744	223	334	2269
70 Series	245 / 70 R 16	107	T	7J	750	248	337	2287
	265 / 70 R 16	112	T	8J	778	272	348	2372
65 Series	245 / 65 R 17	107	H	7J	750	248	340	2287

Rolling Circumference $\pm 2\%$

DUELER H/T 684

4x4 SUMMER Replacement

Original Equipment 4x4 tyre for Subaru Forester,
Suzuki Vitara, Fiat Panda 4x4, Honda CR-V.



70 series	205 / 70 R 15	96	T/H	6J	669	209	302	2040
Rolling Circumference $\pm$ 2%								

DUELER HTS 686

4x4 SUMMER Replacement

Original Equipment 4x4 tyre for G-Model.



60 Series	255 / 60 R 15	102	H	7 1/2J	687	260	309	2095
	275 / 60 R 15	107	H	8J	711	279	319	2168
Rolling Circumference $\pm$ 2%								

DUELER H/T 687

4x4 SUMMER Replacement

Original Equipment 4x4 tyre for Mitsubishi X-Trail, Suzuki Gran Vitara, Subaru Forester, Toyota Rav4, Daihatsu Terios, Hyundai Santafe...



70 series	215 / 70 R 16 225 / 70 R 16	100 103	H H	6 1/2J 6 1/2J	708 722	221 228	320 326	2159 2202

Rolling Circumference $\pm 2\%$

DUELER H/T 689

4x4 SUMMER Replacement


Popular Bridgestone 4x4 tyre, the H/T689 also enjoys a wide range of Original Equipment approvals. The success of the H/T689 is due to its refined and well-balanced, highway oriented performance.



80 Series	215 / 80 R 15 205 / 80 R 16	102 104 RFD	S T	6J 5 1/2J	725 734	216 203	324 330	2211 2238

Rolling Circumference $\pm 2\%$

The A/T 693 offers true all-terrain versatility. UNI-T technology brings improved wet and dry handling, wear resistance. Advanced tread pattern design for optimum traction in off-road conditions.

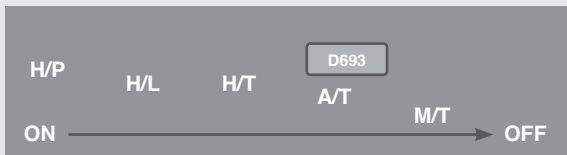

M+S

65 series	255 / 65 R 16	109	T/H	7 1/2J	738	260	332	2250

Rolling Circumference $\pm 2\%$

The rugged and stylish all terrain tyre with outstanding on-road performance.




82 Series	205 / 82 R 16C	110	S	6J	736	208	343	2230
80 Series	195 / 80 R 15	96	T	5 1/2J	693	196	312	2113
	215 / 80 R 15	102	S	6J	725	216	324	2211
	215 / 80 R 16	103	S	6J	750	216	337	2287
75 Series	215 / 75 R 15	100/97	T	6J	703	216	316	2144
	225 / 75 R 15	102	T	6J	719	223	322	2192
	235 / 75 R 15	109 XL	T	6 1/2J	733	235	327	2235
	225 / 75 R 16	103/100	S	6J	744	223	334	2269
	245 / 75 R 16	108	S	7J	774	248	346	2360
	265 / 75 R 16	112	S	7 1/2J	804	267	358	2452
	285 / 75 R 16	116	R	8J	833	289	369	2540
	205 / 70 R 15	96	T	6J	669	209	302	2040
70 Series	225 / 70 R 15	100	T	6 1/2J	697	228	313	2125
	235 / 70 R 15	103	S	7J	711	240	319	2168
	265 / 70 R 15	112	S	8J	753	272	335	2296
	215 / 70 R 16	100	S	6 1/2J	708	221	320	2159
	225 / 70 R 16	102	S	6 1/2J	722	228	326	2202
	235 / 70 R 16	105	T	7J	736	240	331	2244
	245 / 70 R 16	107	T	7J	750	248	337	2287
	255 / 70 R 16	111	S	7 1/2J	764	260	342	2330
	265 / 70 R 16	112	T	8J	778	272	348	2372
65 Series	275 / 70 R 16	114	S	8J	792	279	353	2415
	215 / 65 R 16	98	T	6 1/2J	686	221	312	2092
	265 / 65 R 17	112	T	8J	776	272	350	2366
Misc.	9.5 R 15LT	104	S	7.5	750	240	357	2446
	10.5 R 15LT	109	S	8.5	775	268	357	2446
	7.5 R 16	112	N	6	802	206	357	2446

Rolling Circumference $\pm$ 2%

Driving precision for sporty SUVs with industry leading wet performance and comfort. An aggressive and rugged design with asymmetric tread pattern on larger rim sizes.

Chosen by many leading car manufacturers for high-performance models, including: Audi Q7, BMW X5, Mitsubishi Outlander, Nissan Qashqai, Porsche Cayenne, Volkswagen Touareg

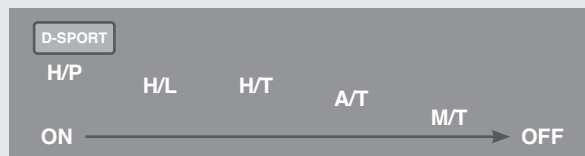

									
65 Series	215 / 65 R 16	98	V	6 1/2J	686	221	312	2092	
	215 / 65 R 16	102 XL	H	6 1/2J	686	221	312	2092	
	255 / 65 R 16	109	H	7 1/2J	738	260	332	2250	
	235 / 65 R 17	104	V	7J	738	240	335	2250	
	235 / 65 R 17	108 XL	V	7J	738	240	335	2250	
60 Series	235 / 60 R 16	100	H	7J	688	240	312	2098	
	255 / 60 R 17	106	H/V	7 1/2J	738	260	335	2250	
	255 / 60 R 18	112 XL	V	7 1/2J	763	260	347	2327	
	285 / 60 R 18	116	V	8 1/2J	799	292	361	2436	
55 Series	225 / 55 R 17	97	W	7J	680	233	312	2074	
	275 / 55 R 17	109	V	8 1/2J	734	284	333	2238	
	285 / 55 R 18	113	V	9J	771	297	350	2351	
50 Series	285 / 50 R 18	109	W	9J	743	297	340	2266	
	255 / 50 R 19	103	V	8J	739	265	341	2253	
	255 / 50 R 19	107 XL	Y	8J	739	265	341	2253	
	255 / 50 R 20	109 XL	V	8J	764	265	353	2330	
45 series	285 / 45 R 19	107	V	9 1/2J	739	285	341	2253	
40 series	275 / 40 R 20	102	W	9 1/2J	728	278	339	2220	
35 series	315 / 35 R 20	106	W	11J	728	320	339	2220	





4x4
WINTER - WARRANTY

BLIZZAK LM25 4x4

4x4 WINTER Warranty

For Toyota Rav4



55 series	235 / 55 R 18	100	H	7 1/2J	715	245	329	2180

Rolling Circumference $\pm 2\%$

ADACmotorwelt

11/2007

Bridgestone LM25 4x4

Dimension 215/65 R 16 T

besonders empfehlenswert

7 Winterreifen im Test

www.adac.de

ADAC



4x4

WINTER - RFT + EXT

BLIZZAK LM25 4x4 RFT

4x4 WINTER RFT

For BMW X5



									
55 series	235 / 55 R 17	99	H	7 1/2J	690	245	317	2105	
	235 / 55 R 19	101	V	7 1/2J	741	245	342	2260	
50 series	255 / 50 R 19	107 XL	V	8J	739	265	341	2253	

Rolling Circumference $\pm 2\%$

BLIZZAK LM25 4x4 EXT

4x4 WINTER EXT

For Mercedes M- & R-Class



									
55 series	255 / 55 R 18	109 XL	H	8J	737	265	337	2247	

Rolling Circumference $\pm 2\%$



4x4

WINTER - REPLACEMENT

New levels of precision control in winter conditions, even at higher speeds of high-powered 4X4 SUVs. Safety and comfort through excellent braking on snow, ice and wet. Reduced risk of aquaplaning with superb high-speed handling in wet and dry conditions. Rugged design balances great traction on snow and ice with a visually attractive look.



80 Series	205 / 80 R 16	104 XL	T	5 1/2J	734	203	330	2238
75 Series	235 / 75 R 15	109 XL	T	6 1/2J	733	235	327	2235
	235 / 75 R 15	105	T	6 1/2J	733	235	327	2235
	225 / 75 R 16	104	T	6J	744	223	334	2269
70 Series	205 / 70 R 15	96	T	6J	669	209	302	2040
	265 / 70 R 15	112	T	8J	753	272	335	2296
	215 / 70 R 16	100	T	6 1/2J	708	221	320	2159
	225 / 70 R 16	107 XL	T/H	6 1/2J	722	228	326	2202
	235 / 70 R 16	106	T	7J	736	240	331	2244
	245 / 70 R 16	107	T	7J	750	248	337	2287
	245 / 70 R 16	111 XL	T	7J	750	248	337	2287
	255 / 70 R 16	111	T	7 1/2J	764	260	342	2330
	265 / 70 R 16	112	T	8J	778	272	348	2372
	215 / 65 R 16	98	H	6 1/2J	686	221	312	2092
65 Series	215 / 65 R 16	98	T	6 1/2J	686	221	312	2092
	255 / 65 R 16	109	T/H	7 1/2J	738	260	332	2250
	225 / 65 R 17	102	H	6 1/2J	724	228	329	2208
	235 / 65 R 17	104	H	7J	738	240	335	2250
	235 / 65 R 17	108 XL	H	7J	738	240	335	2250
	245 / 65 R 17	107	H	7J	750	248	340	2287
	265 / 65 R 17	112	H	8J	776	272	350	2366
	235 / 65 R 18	106	H	7J	763	240	347	2327
60 Series	215 / 60 R 17	96	H	6 1/2J	690	221	316	2104
	235 / 60 R 17	102	H	7J	714	240	335	2177
	255 / 60 R 17	106	H	7 1/2J	738	260	335	2250
	235 / 60 R 18	107 XL	H	7J	739	240	338	2253
	255 / 60 R 18	112 XL	H	7 1/2J	763	260	347	2327
	265 / 60 R 18	110	H	8J	775	272	352	2363
	275 / 60 R 18	113	H	8J	787	279	357	2400
	225 / 55 R 17	97	H	7J	680	233	312	2074
55 Series	235 / 55 R 17	99	H	7 1/2J	690	245	316	2104
	255 / 55 R 17	104	H	8J	712	265	325	2171
	275 / 55 R 17	109	H	8 1/2J	734	284	333	2238

Rolling Circumference $\pm$ 2%



55 Series	225 / 55 R 18	98	V	7J	705	233	325	2150
	235 / 55 R 18	100	H	7 1/2J	715	245	329	2180
	255 / 55 R 18	109 XL	H	8J	737	265	337	2247
	255 / 55 R 18	109 XL	V	8J	737	265	337	2247
50 Series	235 / 50 R 18	97	H	7 1/2J	693	245	320	2113
	255 / 50 R 19	107 XL	V	8J	739	265	341	2253
	265 / 50 R 19	110 XL	V	8 1/2J	749	277	345	2284
45 Series	275 / 45 R 20	110 XL	V	8 1/2J	749	277	345	2284

Rolling Circumference $\pm 2\%$



Multicell technology giving you top 4X4 performance whatever the weather throws at you. Hard wearing on the road and hard working off it, the DMZ3 lets you go where your imagination takes you.

Tyre designed with snow simulation technology that measures the steering force distribution to the nearest millimetre. The block edge platform design gives an increased takeoff power on snow. The combination of riblets microgrooves and multicell compound assumes consistent grip on ice, from the first day onwards. Increased braking and acceleration performance on ice.



80 Series	195 / 80 R 15	96	Q	5 1/2J	693	196	312	2113
	215 / 80 R 15	101	Q	6J	725	216	324	2211
	225 / 80 R 15	105	Q	5J	686	177	309	2092
	175 / 80 R 16	91	Q	5J	686	178	312	2092
	205 / 80 R 16	104 RFD	Q	5 1/2J	80	16	406	734
	215 / 80 R 16	103	Q	6J	750	216	337	2287
70 Series	205 / 70 R 15	96	Q	6J	669	209	302	2040
	225 / 70 R 15	100	Q	6 1/2J	697	228	313	2125
	235 / 70 R 15	103	Q	7J	711	240	319	2168
	255 / 70 R 15	112	L	7 1/2J	739	260	330	2253
	265 / 70 R 15	110	Q	8J	753	272	335	2296
	215 / 70 R 16	99	Q	6 1/2J	708	221	320	2159
	225 / 70 R 16	102	Q	6 1/2J	722	228	326	2202
	235 / 70 R 16	105	Q	7J	736	240	331	2244
	245 / 70 R 16	107	Q	7J	750	248	337	2287
	255 / 70 R 16	109	Q	7 1/2J	764	260	342	2330
	265 / 70 R 16	112	Q	8J	778	272	348	2372
	275 / 70 R 16	114	Q	8J	792	279	353	2415
65 Series	225 / 70 R 17	108 RFD	Q	6 1/2J	70	17	432	722
	215 / 65 R 16	98	Q	6 1/2J	686	221	312	2092
	255 / 65 R 16	109	Q	7 1/2J	738	260	332	2250
	225 / 65 R 17	101	Q	6 1/2J	724	228	329	2208
	235 / 65 R 17	108 RFD	Q	7J	738	240	335	2250
	265 / 65 R 17	112	Q	8J	776	272	350	2366
60 Series	235 / 65 R 18	106	Q	7J	763	240	347	2327
	235 / 60 R 16	100	Q	7J	688	240	312	2098
	215 / 60 R 17	96	Q	6 1/2J	690	221	316	2104
	225 / 60 R 17	99	Q	6 1/2J	702	228	321	2141
	235 / 60 R 18	107 XL	Q	7J	739	240	338	2253
	255 / 60 R 18	112 XL	Q	7 1/2J	763	260	347	2327
	265 / 60 R 18	110	Q	8J	775	272	352	2363
	275 / 60 R 18	113	Q	8J	787	279	357	2400
	285 / 60 R 18	116	Q	8 1/2J	799	292	361	2436

Rolling Circumference $\pm$ 2%



55 Series	235 / 55 R 17	103 XL	Q	7 1/2J	690	245	316	2104	
	255 / 55 R 18	97	Q	7J	705	233	325	2150	
	235 / 55 R 18	100	Q	7 1/2J	715	245	329	2180	
	255 / 55 R 18	109 XL	Q	8J	737	265	337	2247	
50 Series	255 / 50 R 19	107 XL	Q	8J	739	265	341	2253	
Misc.	9.5 R 15LT	104	Q	7.5	750	240	334	2287	
	10.5 R 15LT	109	Q	8.5	775	268	344	2363	

Rolling Circumference $\pm 2\%$



VAN
SUMMER - WARRANTY

TURANZA ER30C

Warranty CVR

For Ford Galaxy, VW Sharan



60 Series	195 / 60 R 16 C	99/97	H	6J	640	201	302	1939
55 Series	205 / 55 R 16 C	98/96	H	6 1/2J	632	214	299	1914

Rolling Circumference $\pm 2\%$

V-STEEL RIB 294

Warranty CVR

Steer axle designed tyre for highway use.
Excellent wet and dry manoeuvrability and a long tread life.
Can be used also as an all position tyre.



75 Series	215 / 75 R 16	116	N	6J	728	216	328	2220

Rolling Circumference $\pm 2\%$

The Duravis R410 is specially designed for car derived vans.

Application of latest technologies ensure a high durability, high mileage and safety in the wet.

The reinforced sidewall promotes the prevention of early tyre loss due to damage from curbing etc. For Mercedes Vito/Viano, VW T5, Peugeot Expert / Fiat Scudo & Doblo.

sections 145 & 165

sections 175 & 195



65 Series	185 / 65 R 15	92 RFD	T	5 1/2J	621	189	284	1894
	195 / 65 R 16 C	100/98	T	6J	660	201	310	1999
	205 / 65 R 16 C	103/101	T	6J	672	209	316	2036
	215 / 65 R 16 C	102/100	H	6 1/2J	686	221	322	2078
	215 / 65 R 16 C	106/104	T	6 1/2J	686	221	322	2078
60 Series	215 / 60 R 16 C	103/101	T	6 1/2J	664	221	312	2011
	225 / 60 R 16	102 XL	H	6J	676	228	308	2061

Rolling Circumference $\pm 2\%$

Designed for transporters for day-to-day deliveries around town.

R623 gives improved overall performance, especially in wet, dry, comfort and noise.

The aggressive, three wide zigzag groove tyre also features an increased tyre life because of optimised tread design as well as superior bead durability. For Ford Transit, Mercedes Sprinter, Toyota Hilux, Mitsubishi L200, ...



82 series	195 / 82 R 15 C	106	R	5 1/2J	690	198	321	2090
75 Series	185 / 75 R 16 C	104/102	R	5 1/2J	684	184	321	2072
	215 / 75 R 16 C	113/111	R	6J	728	216	339	2205
70 Series	195 / 70 R 15 C	104/102	R	5 1/2J	655	201	306	1984
	205 / 70 R 15	106/104	Q	6J	669	209	302	2040
	205 / 70 R 15	106/104	S	6J	669	209	302	2040
	215 / 70 R 15 C	106/104	S	6J	683	221	318	2069
	225 / 70 R 15 C	112/110	R	6 1/2J	697	228	324	2111

Rolling Circumference $\pm 2\%$

The Duravis R630 brings improved economy, safety and durability to commercial vans and light trucks. The Super LL Carbon compound helps extend tyre life up to 30% longer than conventional tyres and the advanced tread design provides outstanding wet handling. Additional technologies give the tyre rugged, durable performance for intensive commercial use. For Iveco Daily, Fiat Ducato/Doblo, Peugeot Boxer, ...



								
75 Series	175 / 75 R 14 C	99/98	T	5J	618	177	289	1872
	195 / 75 R 16 C	107/105	R	5 1/2J	698	196	327	2114
70 Series	205 / 70 R 15 C	106/104	R	6J	669	209	312	2027
	215 / 70 R 15 C	109/107	S	6J	683	221	318	2069
	225 / 70 R 15 C	112/110	S	6 1/2J	697	228	324	2111
65 Series	195 / 65 R 16 C	104/102	R	6J	660	201	310	1999
	205 / 65 R 16 C	107/105	R	6J	672	209	316	2036
	215 / 65 R 16 C	109/107	R	6 1/2J	686	221	322	2078
	225 / 65 R 16 C	112/110	R	6 1/2J	698	228	227	2114
	235 / 65 R 16 C	115/113	R	7J	712	240	333	2157

Designed for transporters for day-to-day deliveries around town.

The rib type tread pattern provides improved resistance to irregular wear and increased tread life.

Also increased durability. For Ford Ranger, Isuzu Rodeo, Toyota Hiace, ...



Rolling Circumference $\pm 2\%$



VAN
SUMMER - REPLACEMENT

Steer axle designed tyre for highway use.
Excellent wet and dry manoeuvrability and a long tread life.
Can be used also as an all position tyre.



								
75 Series	225 / 75 R 16 C	121	N	6 1/2J	744	223	346	2254
Rolling Circumference $\pm$ 2%								

The Duravis R410 is specially designed for car derived vans.

Application of latest technologies ensure a high durability, high mileage and safety in the wet.

The reinforced sidewall promotes the prevention of early tyre loss due to damage from curbing etc.

sections 145 & 165



80 Series	165 / 80 R 13	87 RFD	R	4 1/2J	594	165	267	1811	
70 Series	165 / 70 R 13	83 RFD	R	5J	562	170	255	1714	
	165 / 70 R 14	85 RFD	R	5J	588	170	268	1793	
	165 / 70 R 14 C	89/87	R	5J	588	170	276	1781	
65 Series	175 / 65 R 14	86 RFD	T	5J	584	177	266	1781	
	175 / 65 R 14 C	90/88	T	5J	584	177	274	1769	
	205 / 65 R 15 C	102/100	T	6J	647	209	303	1960	
	215 / 65 R 15 C	104/102	T	6 1/2J	661	221	309	2002	

Rolling Circumference $\pm 2\%$

Designed for transporters for day-to-day deliveries around town.
R623 gives improved overall performance, especially in wet, dry, comfort and noise.
The aggressive, three wide zigzag groove tyre also features an increased tyre life because of optimised tread design as well as superior bead durability.



								
75 Series	185 / 75 R 16 C	104/102	R	5J	684	184	314	2072

Rolling Circumference ± 2%

The Duravis R630 brings improved economy, safety and durability to commercial vans and light trucks. The Super LL Carbon compound helps extend tyre life up to 30% longer than conventional tyres and the advanced tread design provides outstanding wet handling. Additional technologies give the tyre rugged, durable performance for intensive commercial use.



82 Series	175 / 82 R 14 C	99/98	R	5J	634	178	296	1921
	185 / 82 R 14 C	102/100	R	5 1/2J	650	188	302	1969
	195 / 82 R 14 C	106/104	R	5 1/2J	666	198	309	2017
	185 / 82 R 15 C	103/102	R	5 1/2J	674	188	315	2042
75 Series	175 / 75 R 14 C	99/98	R	5J	618	177	289	1872
	185 / 75 R 14 C	102/100	R	5 1/2J	634	184	296	1921
	175 / 75 R 16 C	101/99	R	5J	668	177	314	2024
	185 / 75 R 16 C	104/102	R	5 1/2J	684	184	321	2072
	205 / 75 R 16 C	110/108	R	6J	714	203	333	2163
	215 / 75 R 16 C	113/111	R	6J	728	216	339	2205
	215 / 75 R 16 C	116/114	Q	6J	728	216	339	2205
70 Series	195 / 70 R 15 C	104/102	R	5 1/2J	655	201	306	1984
	215 / 70 R 15 C	109/107	R	6J	683	221	318	2069
	225 / 70 R 15 C	112/110	R	6 1/2J	697	228	324	2111
65 Series	195 / 65 R 16 C	104/102	R	6J	660	201	310	1999
	205 / 65 R 16 C	107/105	T	6J	672	209	316	2036
	215 / 65 R 16 C	109/107	R	6 1/2J	686	221	322	2078
	225 / 65 R 16 C	112/110	R	6 1/2J	698	228	327	2114

Designed for transporters for day-to-day deliveries around town.
The rib type tread pattern provides improved resistance to irregular wear and increased tread life.
Also increased durability.



								
82 Series	145 / 82 R 13 C	88	N	4 1/2K	566	147	265	1714
Rolling Circumference ± 2%								



VAN
WINTER - WARRANTY

BLIZZAK LM18C

Offering van drivers all the braking, balance and build quality of its sister car model. With improved wear resistance, wear uniformity and excellent braking on ice and wet surfaces. Thanks to its toughened construction, it'll do it for longer than ever.



65 Series	215 / 65 R 16 C	102/100	T	6 1/2J	686	221	322	2078
	215 / 65 R 16 C	106/104	T	6 1/2J	686	221	322	2078

Rolling Circumference $\pm$ 2%

BLIZZAK LM22C

Warranty CXR

The LM22C offers MPV drivers the same lamellen construction, grip and response as the LM22 plus improved low temperature handling, less compromise on stability and comfort and better performances on both wet and dry surfaces. For Ford, VW.



55 Series	205 / 55 R 16 C	98/96	T	6 1/2J	632	214	299	1914

Rolling Circumference $\pm$ 2%

V-STEEL MIX M723

Warranty CXR

All season tyre for commercial vans and light trucks. The unique zigzag and lamellen siped pattern provides superior snow and wet performance and quiet operation. Its robust belt and bead construction ensure improved durability. M723 also offers superb serviceability.



70 Series	195 / 70 R 15 C 225 / 70 R 15 C	104/102 112/110	R R	5 1/2J 6 1/2J	655 697	201 228	306 324	1984 2111
-----------	------------------------------------	--------------------	--------	------------------	------------	------------	------------	--------------

Rolling Circumference $\pm 2\%$



VAN
WINTER - REPLACEMENT

Offering van drivers all the braking, balance and build quality of its sister car model. With improved wear resistance, wear uniformity and excellent braking on ice and wet surfaces. Thanks to its toughened construction, it'll do it for longer than ever.



70 Series	165 / 70 R 14 C	89/87	R	5J	588	170	276	1781
65 Series	175 / 65 R 14 C	90/88	T	5J	584	177	274	1769
	205 / 65 R 15 C	102/100	T	6J	647	209	303	1960
60 Series	195 / 60 R 16 C	99/97	T	6J	640	201	302	1939
	205 / 60 R 16 C	100/98	T	6 1/2J	652	209	307	1975
	215 / 60 R 16 C	103/101	T	6 1/2J	664	221	312	2011

Rolling Circumference $\pm$ 2%

All season tyre for commercial vans and light trucks. The unique zigzag and lamellen siped pattern provides superior snow and wet performance and quiet operation. Its robust belt and bead construction ensure improved durability. M723 also offers superb serviceability.



82 Series	145 / 82 R 13 C	88/86	N	4 1/2K	566	147	265	1714
	165 / 82 R 14 C	97/95	N	4 1/2J	622	167	291	1884
75 Series	185 / 75 R 16 C	104/102	P	5 1/2J	684	184	321	2072
	225 / 75 R 16 C	121/120	N	6 1/2J	744	223	346	2254

Rolling Circumference $\pm$ 2%

Studdable mud and snow tyre specially designed to survive harsh Nordic winters. Suitable for fitment at all positions. Aggressive tread pattern gives superior traction in the most severe winters. Increased grip on ice, snow and wet through the use of special tread compounds.



M+S

82 Series	155 / 82 R 12 C	88	N	4 1/2J	550	157	256	1666
	145 / 82 R 13 C	88	N	4 1/2J	566	145	265	1714
	185 / 82 R 14 C	102	Q	5 1/2J	650	188	302	1969
	195 / 82 R 14 C	106	Q	5 1/2J	666	198	309	2017
	195 / 82 R 15 C	106	N	5 1/2J	690	198	321	2090
	205 / 82 R 16 C	106	N	6J	736	208	343	2230

Rolling Circumference $\pm$ 2%

BLIZZAK W965 MULTICELL

Replacement CXR

"Tubed" multicell compound to ensure that vans survive even the harshest Nordic winter conditions. Unbeatable precision and grip on ice and snow. Increased comfort and wear life plus excellent performance in all weather conditions.



82 Series	185 / 82 R 14 C	102/100	N	5 1/2J	650	188	302	1969
	195 / 82 R 14 C	106/104	N	5 1/2J	666	198	309	2017
75 Series	195 / 75 R 16 C	107/105	N	5 1/2J	698	196	327	2114
	205 / 75 R 16 C	113/111	N	6J	714	203	333	2163
70 Series	195 / 70 R 15 C	104/102	N	5 1/2J	655	201	306	1984
	225 / 70 R 15 C	112/110	N	6 1/2J	697	228	324	2111
65 series	205 / 65 R 16 C	107/105	Q	6J	672	209	316	2036
	215 / 65 R 16 C	109	Q	6 1/2J	686	221	322	2078

Rolling Circumference $\pm$ 2%

Rolling Circumference $\pm 2\%$

Bridgestone's new Noranza Van studded tyre is designed to cope with the most severe Nordic winter conditions.

Secure handling and steering stability. Superb traction and braking performance on snow and ice. High level of durability. Excellent mileage performance



75 Series	195 / 75 R 16 C*	107/105	Q	5 1/2J	698	196	327	2114
	205 / 75 R 16 C*	110/108	Q	6J	714	203	333	2163
70 Series	195 / 70 R 15 C*	104/102	Q	5 1/2J	655	201	306	1984
	225 / 70 R 15 C*	112/110	Q	6 1/2J	697	228	324	2111
65 Series	175 / 65 R 14 C*	90/88	Q	5J	584	177	274	1769
	195 / 65 R 16 C*	104/102	Q	6J	660	201	310	1999
	205 / 65 R 16 C*	107/105	Q	6J	672	209	316	2036
	215 / 65 R 16 C*	109/107	Q	6 1/2J	686	221	322	2087
	225 / 65 R 16 C*	112/110	Q	6 1/2J	698	228	327	2114
	235 / 65 R 16 C*	115/113	Q	7J	712	240	333	2157

* Under development

Rolling Circumference $\pm 2\%$

Index

Passenger summer warranty

Potenza RE050A	34
Potenza RE050	36
Potenza RE040	37
Potenza RE88	38
Potenza RE080	38
Potenza RE030	39
Potenza RE031	39
Potenza RE010	40
Potenza RE070	40
Potenza S02	41
Potenza S02A	42
Expedia S01	43
S01-L & S01-R	44
Turanza ER300	45
Turanza ER30	46
Turanza ER31	47
Turanza ER33	47
Turanza ER370	48
Regno GR01	48
B250	49
B340	50
B371	50
B381	51
B390	51
B391	52
SF 226	53
SF 381	53

Passenger summer RFT + EXT

Potenza RE050A RFT	56
Potenza RE050-1 RFT	57
Potenza RE050A1 RFT	57
Potenza RE050A2 RFT	58
Potenza RE050 RFT	58
Potenza RE040 RFT	59
Potenza RE050A EXT	59
Potenza RE050 EXT	60
Potenza RE71G RFT	60
Turanza ER300 RFT	61
Turanza ER300-1 RFT	61
Turanza ER33 RFT	62
Turanza ER42 RFT	62

Passenger summer replacement

Potenza RE050A	64
Turanza ER300	66
B250	67
B330	68
B330 EVO	68

Index

Passenger winter warranty

BLIZZAK LM22	70
BLIZZAK LM25	70

Passenger winter RFT + EXT

Blizzak RFT	72
Blizzak LM22 RFT	72
Blizzak LM25 RFT	73
Blizzak LM25 EXT	74
Blizzak MZ03 RFT	74

Passenger winter replacement

Blizzak LM18	76
Blizzak LM20	77
Blizzak LM22	78
Blizzak LM25	79
Blizzak MZ03	81
Blizzak Nordic	82
Noranza 2	83
Noranza	84

4x4 summer warranty

DUELER H/L 400	90
DUELER H/L 683	90
DUELER H/T 684	91
DUELER H/T 684 II	91
DUELER H/T 687	92
DUELER H/T 688	93
DUELER H/T 689	94
DUELER A/T 693	95
DUELER A/T 693 II	95
DUELER H/T 840	96
DUELER ALENZA	97
DUELER H/P SPORT	98
TURANZA EL42	99
TURANZA ER30	99
RD610 STEEL DESERT DUELER	100

4x4 summer RFT

DUELER H/L 400 RFT	102
DUELER H/P SPORT RFT	102
TURANZA ER30 EXT	103

4x4 summer replacement

DUELER M/T 673	106
DUELER H/P 680	107
DUELER H/L 683	108
DUELER H/T 684	109
DUELER HTS 686	109
DUELER H/T 687	110

Index

4x4 summer replacement

DUELER H/T 689	110
DUELER A/T 693	111
DUELER A/T 694	112
DUELER H/P SPORT	113

4x4 winter warranty

BLIZZAK LM25 4x4	116
------------------	-----

4x4 winter RFT + EXT

BLIZZAK LM25 4x4 EXT	118
BLIZZAK LM25 4x4 RFT	118

4x4 winter replacement

BLIZZAK LM25 4x4	120
BLIZZAK DMZ3	122

Van summer warranty

TURANZA ER30C	126
V-STEEL RIB 294	126
DURAVIS R410	127
DURAVIS R623	128
DURAVIS R630	129
RD613 STEEL	130

Van summer replacement

V-STEEL RIB 294	132
DURAVIS R410	133
DURAVIS R623	134
DURAVIS R630	135
RD613 STEEL	136

BLIZZAK LM18C	138
BLIZZAK LM22C	138
V-STEEL MIX M723	139

Van summer replacement

BLIZZAK LM18C	142
V-STEEL MIX M723	142
RD713P	143
BLIZZAK W965 MULTICELL	143
BLIZZAK W800	144
NORANZA VAN	145

Bridgestone Addresses

AUSTRIA

Bridgestone Austria GmbH
Laxenburgerstraße 252
1232 Vienna - Austria

Tel: +43 1 61 41 32 01
Fax: +43 1 61 41 31 00

BELGIUM - G.D. OF LUXEMBOURG

Bridgestone Belux nv/sa
Bedrijvenlaan 5
2800 Mechelen - Belgium

Tel: +32 (0)15 28 19 19
Fax: +32 (0)15 28 19 10

BULGARIA

Representative office of Bridgestone Europe nv/sa
102' Bulgaria blvd., Office No.4
1618 Sofia - Bulgaria

Tel: +359 2 854 81 48

CZECH REPUBLIC

Bridgestone Czech Ltd.
Prague City Center
Klimentská 46
110 02 Praha 1 - Czech Republic

Tel: +420 2 2185 6019
Fax: +420 2 2185 6022

DENMARK

Bridgestone Danmark A/S.
Sigma, 1 Søften,
8382 Hinnerup - Denmark

Tel.: +45 87 64 66 68
Fax: +45 87 64 66 66

FINLAND

Bridgestone Finland OY
Korpivaarantie 1
PL 22 – 01451 Vantaa - Finland

Tel: +358 9 8578 6200
Fax: +358 9 8578 6250

FRANCE

Bridgestone France
Parc d'activités du Moulin de Massy
23, rue du Saule Trapu
91882 Massy cedex - France

Tel: +33 1 69 19 27 00
Fax: +33 1 69 19 27 01

GERMANY

Bridgestone Deutschland GmbH
Industriestrasse 1
61352 Bad Homburg v.d.H. - Germany

Tel: +49 61 72 40 801
Fax: +49 61 72 40 8490

GREECE

ELASTRAK
15, Thivaidos Street, N. Kifissia
14564 Athens - Greece

Tel: +30 210 819 69 20
Fax: +30 210 807 78 18

HUNGARY

Bridgestone Magyarországi Kft.
Váci Út 140
H-1138 Budapest - Hungary

Tel: +36 1 430 27 80
Fax: +36 1 387 93 11

IRELAND

Bridgestone Ireland Limited
Fingal Bay Business Park Unit 10
Balbriggan - Co. Dublin - Ireland

Tel: +353 1 841 52 00
Fax: +353 1 841 52 45

Bridgestone Addresses

ITALY

Bridgestone Italia S.p.A.
Centro Direzionale Colleoni
Palazzo Taurus - Scala 2
Viale Colleoni 3
20041 Agrate Brianza Milano - Italy

Tel: +39 039 656 01 1
Fax: +39 039 68 99 637

THE NETHERLANDS

Bridgestone Nederland
Distriboulevard 15
4761 RZ Moerdijk - The Netherlands

Tel: +31 168 38 51 10
Fax: +31 168 38 51 11

NORWAY

Gjerde & Byhring
Jerikoveien 22
1067 Oslo - Norway

Tel: +47 22 30 65 77
Fax: +47 22 30 60 93

POLAND

Bridgestone Sales Polska Sp. z o.o.
Domaniewska 41
02-672 Warszawa - Poland

Tel.: +48 22 606 18 20
Fax: +48 22 606 18 22

PORTUGAL

Bridgestone Portuguesa, LDA.
Urbanização do Passil
Lote 96 A Passil
2890 - 118 Alcochete - Portugal

Tel.: +351 21 230 7350
Fax: +351 21 230 7391

ROMANIA

Bridgestone Romania
Blvd. Mircea Voda nr.24, Et.2
030662 Bucuresti - Romania

Tel: +40 21 302 37 16 / 302 37 17
Fax: +40 21 302 36 06

SPAIN

Bridgestone Hispania
C/Fuerteventura 9
Polígono Industrial Norte,
S. Sebastián de los Reyes
28700 Madrid - Spain

Tel.: +34 1 623 30 17
Fax: +34 1 623 30 44

SWEDEN

Bridgestone Sweden AB
Gärdevägen 5 A
852 52 Sundsvall - Sweden

Tel: +46 60 51 52 00
Fax: +46 60 56 61 21

SWITZERLAND

Bridgestone Schweiz
Limmatpark
Pfädackerstraße 6
8957 Spreitenbach - Switzerland

Tel: +41 56 418 71 11
Fax: +41 56 71 34 68

U.K.

Bridgestone U.K. Ltd.
Bridgestone House
Athena Drive
Tachbrook Park
Warwick CV 34 6UX - UK

Tel.: +44 (0) 1926 48 85 00
Fax: +44 (0) 1926 48 86 00

BRIDGESTONE EUROPE NV/SA

Kleine Kloosterstraat 10
1932 Zaventem, Belgium
Tel.: (+32) 2 714 67 00
Fax: (+32) 2 714 67 09
www.bridgestone.eu